



C 300H
C 300HI
C 300HIx4
C 350H
C 350HI
C 350HIx4



www.ause.com

AUSA Center, S.L.U. ● Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: ause@ause.com

ISO 9001 ISO 14001



(Sede central AUSA-Manresa)

AUSA Madrid ● Pol. Ind. Coslada-Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: ause.madrid@ause.com
AUSA France ● Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: ause.france@ause.com
AUSA Verkauf & Service Deutschland ● Heinrich-Welken Straße 5, 59069 HAMM-RHYERN (GERMANY) Tel.: +49(0)2385-9359362 E-mail: ause.deutschland@ause.com
BEIJING Rep. Office ● Address Room 527, HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - Beijing 100026 CHINA
 Tel: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ause.china@ause.com

AUSA UK ● Sales: 07970639988 E-mail: ause.uk@ause.com
AUSA Northamerica Corp. ● E-mail: ause.corp@ause.com




FEM-AEM



C 300H_3000 Kg
C 350H_3500 Kg



DIMENSIONS (mm)	C 300 H	C 300 H x4	C 350 H	C 350 Hx4
A	2200	2200	2240	2240
B	250	220	250	220
C	325	325	380	380
D	1460	1460	1460	1460
(narrow axle) E	1540	1540	1770	1770
(wide axle) E	1870	1870	1910	1910
F	3500	4700	3500	4700
G	2850	3005	2850	3005
I	120	120	120	120
J	50	50	50	50
K	750	750	750	750
L	4500	4500	4500	4500
M	600	600	600	600
N	1950	1950	1950	1950
O	1200	1200	1200	1200
P	5600	6805	5600	6805

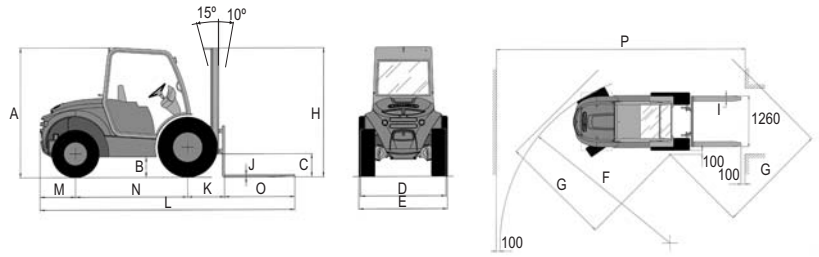

Type of mast	Maximum lifting height (mm)	Front axle	Free lift (mm)	H Machine height with mast retracted (mm)				Machine height with mast extended (mm)				Load (Kg) at max. height					
				C 300 H	C 350 H	C300Hx4	C350Hx4	C 300H	C350H	C300Hx4	C350Hx4	C 300H C 300Hx4 (narrow axle)	C 300H C 300Hx4 (wide axle)	C 350H C 350Hx4 (wide axle)	C 350H C 350Hx4 (narrow axle)	C 350H C 350Hx4 (wide axle)	
Duplex (Std.)	3300	Narrow /Wide (op.)	120	2440	2480	2440	2480	4500	4500	4500	4500	3000	3000	3000	3500	3500	3500
Duplex	4000	Narrow /Wide (op.)	120	2790	2830	2790	2830	5200	5200	5200	5200	2250	2550	2250	3000	3000	3500
Triplex (free lift)	3700	Narrow /Wide (op.)	1200	2090	2130	2090	2130	4900	4900	4900	4900	2400	2700	2400	3200	3200	3500
Triplex (free lift)	5400	Wide	1680	2657	2698	2657	2698	6600	6600	6600	6600	-	1300	1500	-	1500	1600
Triplex (free lift)	6780	Wide	2280	-	3200	-	3200	-	6870	-	6870	-	1000	-	-	1200	600

TECHNICAL SPECIFICATIONS

	C 300H / C 300HI	C 300H x4 / C 300 HI x4	C 350H / C 350HI	C 350H x4 / C 350HI x4
Load capacity (Kg) @ centre of gravity	3000 @ 500 mm / 2800 @ 600 mm		3500 @ 500 mm / 3250 @ 600 mm	
Lifting height (Standard duplex mast) (mm)	3300			
Engine	KUBOTA V 2403-M		KUBOTA V 2403-M	
Power acc./SAE J 1995 (KW/HP)	36,5 / 49,6 (2600 rpm)		36,5 / 49,6 (2600 rpm)	
N° of cylinders	4			
Displacement (cc)	1999		3318	
Cooling system	Water			
Traction	2	4	2	4
Transmission	Hydrostatic with variable flow pump and automatic regulation Electric gear inverter Inching pedal			
Unladen weight (Kg) (with full tanks)	4700	4900	5000	5200
Gradient negotiable (with full load)	35%		32%	
Speed (Maximum) (Km/h)	20			
Engine starting system	Electric			
Tyres	Front 12,5/80-18	12,5/80-18	16/70-20	16/70-20
	Rear 27x10-12	10,0/75-15,3	27x10-12	10,0/75-15,3
Steering	Hydraulic. Working pressure 140 bar.			
External turning circle (mm)	3500	4700	3500	4700
Tank capacity (l)	Fuel 80	Hydraulic fluid 65		
Service brake	Oil-immersed, multidisc, hydraulically driven			
Parking brake	Oil-immersed, multidisc, hydraulically driven			
Hydraulic circuit	18-8 cc. double gear pump. Working pressure 170 bar		18-8 cc. double gear pump. Working pressure 190 bar	
Operating pressures for accessories (bar)	170		190	
Forkcarriage	FEM 3 - Width: 1200 mm (optional: 1660 mm)			

STANDARD EQUIPMENT

- Open cabin
- Ergonomic seat
- Seat belt
- Joystick
- Rotating beacon
- Side-shift
- Audible reverse warning

OPTIONAL EQUIPMENT

- Semi-closed cabin
- Full cabin with heater
- Front and rear lights
- Wide front axle
- Catalytic converter
- Spark arrestor
- Fuel oil filter with water separator
- 600, 800 and 1000 litre hydraulic buckets