



CC334CHF

Combi rollers

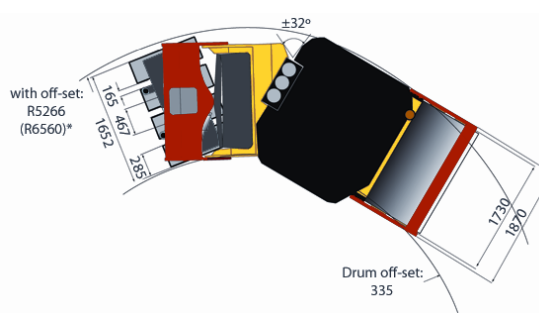

Technical data

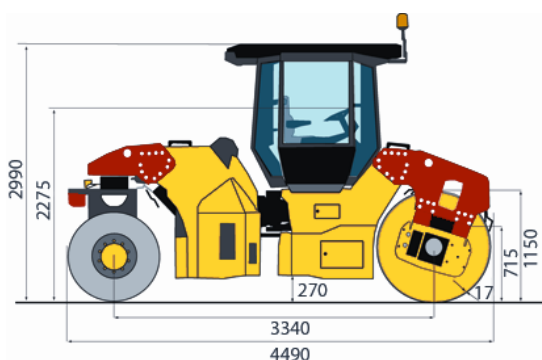

| Masses | | CC334CHF |
|--|--|--|
| Max. operating mass | | 8,900 kg |
| Operating mass (incl. ROPS) | | 7,900 kg |
| Front module mass | | 4,300 kg |
| Rear module mass | | 3,600 kg |
| Traction | | |
| Speed range (km/ h) | | 0 - 11 |
| Vertical oscillation | | ±7 |
| Theor. gradeability | | 43 % |
| Compaction | | |
| Static linear load | | 24.90 kg/ cm |
| Wheel load | | 900(kg/ wheel) |
| Nominal amplitude, high | | 0.50 mm |
| Nominal amplitude, low | | 0.20 mm |
| Vibration frequency, at high amplitude | | 48 Hz |
| Vibration frequency, at low amplitude | | 67 Hz |
| Centrifugal force, at high amplitude | | 79 kN |
| Centrifugal force, at low amplitude | | 64 kN |
| Water tank (l) | | 750 |
| Emulsion tank | | 65 l |
| Split drums | | Yes |
| Engine | | |
| Manufacturer | | Cummins |
| Model | | QSB 3.3 T3 |
| Type | | Water cooled turbo Diesel with After Cooler |
| Rated power | | 2,430 kW |
| Rated power | | 99 hp |
| Rated power @ | | 2,200 rpm |
| Fuel tank capacity | | 130 l |
| Hydraulic system | | |
| Driving | | Axial piston pump with variable displacement. Axial piston motors (3) with variable displacement. |
| Vibration | | Axial piston pump with variable displacement and Axial piston motor with constant displacement. |
| Steering | | Gear pump with constant displacement. |
| Service brake | | Hydrostatic in forward and reverse lever. |
| Parking/ Emergency brake | | Failsafe multidisc brake in both drums. |

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

cc334chf_en-20090615.162011.pdf 2009-06-15 16:20