

H.A.B Model S 240 – 25 D4WDS

Features:

- Driveable in full height
- Foldable steel guard rails
- CE – certified components
- Automatic self – levelling outrigger system
- 4WD and 4WS
- Max. stability due to three – scissors mechanism
- Unlimited platform capacity on platform and extension
- Oscillating axle for max. traction
- All proportional drive, lift and lowering functions



Technical Features

Working height	24.00 m
Platform height	22.00 m
Platform size	5.48 m x 2.44 m
Platform extension	2.10 m
Clearance height	3.00 – 3.85 m
Platform capacity	1000 kg
Outer turning radius	6.02 m
Inner turning radius	3.05 m
Engine	4 Zyl. Deutz 41 KW
Drive speed in km/h (l/e) *	4.0 0.7
Diesel	Yes
Lifting time	ca. 80 Sec
Lowering time	ca. 80 Sec
Ground clearance	220 mm
Wheelbase	4.10 m
Max. inclination	3°
Control	Proportional
Greadability	ca. 40%
Weight	16200 kg
Max. ground bearing pressure	69 N/cm ²
Driveable in full height	Yes
External using	Yes
4 WD	Yes
4 WS	Yes
Self-levelling Jacks	Yes

Transport Features

Stowed height	3.00 m
Length	5.96 m
Width	2.50 m

*e=elevated; l=lowered

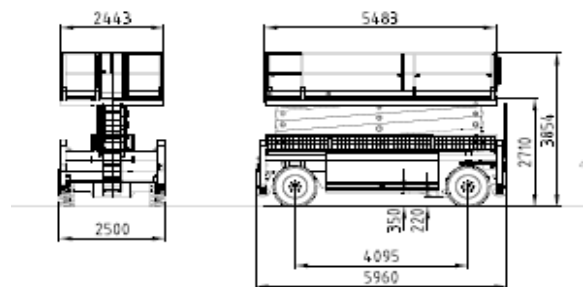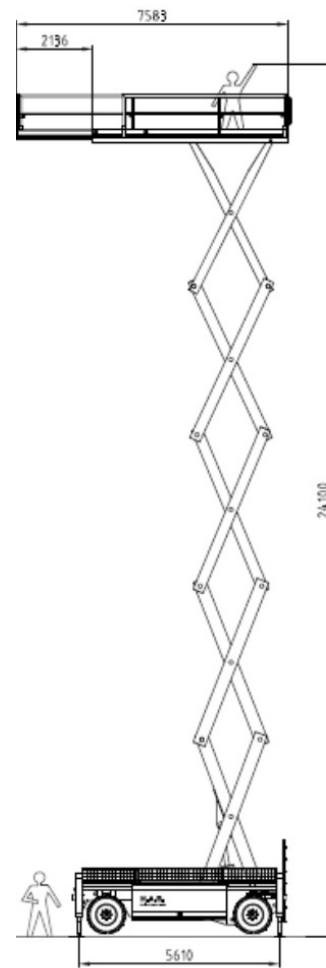

Automatic self-levelling outrigger system and oscillating axle

H.A.B.

H.A.B. Service Center GmbH
Heidigstrasse 17
76709 Kronau

Telefon: +49 (0) 7253 / 94 01 – 0
Telefax: +49 (0) 7253 / 94 01 – 26
service@hab-hubarbeitsbuehnen.de