

DC 133 & 163 CENTER-PIVOT ROTARY DISC MOWER CONDITIONERS



DC 133 & 163

CENTER-PIVOT ROTARY DISC MOWER CONDITIONERS



3 YEAR CUTTERBAR FACTORY WARRANTY

With every rotary disc mower conditioner, you get the proven reliability of the large disc cutterbar with the peace of mind provided by **36-months** of cutterbar warranty coverage. Coverage includes one full-year of base factory warranty, plus two additional full years and unlimited hours of extended factory disc cutterbar warranty.



HARVEST SOONER WITH EXCEPTIONAL CONDITIONING.

Achieve optimum dry down time in all crop conditions with Case IH rotary disc mower conditioners, designed with consistent, thorough conditioning in mind. With an effective torsion-bar roll-pressure design, the Case IH conditioning system applies equal force to the upper conditioning roll arms for uniform conditioning, regardless of crop thickness. Achieve a new level of conditioning performance with the user-friendly and simple “fine tenability” of Case IH conditioning systems.




EASY ADJUSTMENTS.

Fine-tuning the conditioning roll pressure is quick and easy, with no tools required.



RUBBER-ON-RUBBER.

Spiral rubber-on-rubber conditioning rolls provide thorough crimping and crushing for fast dry down.

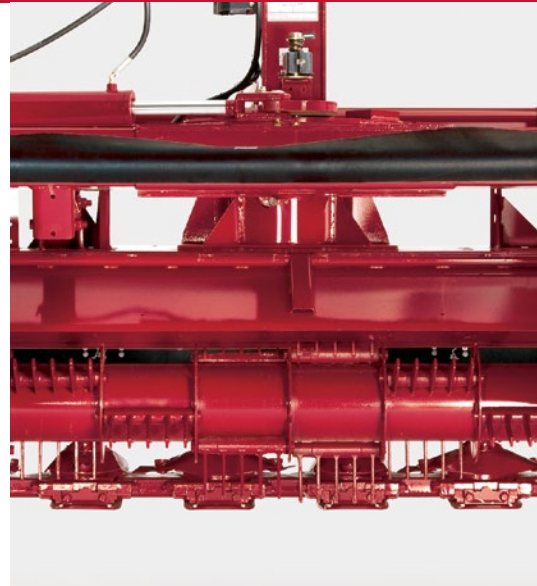

FLAIL CONDITIONING ROLLS.

Provide a scuffing action to the plant stems, removing the waxy outer layer for faster dry down, particularly in grassy crops. They are available on all Case IH disc mower conditioners.



STEEL-ON-STEEL.

Spiral steel-on-steel conditioning rolls offer longer life and provide thorough conditioning, particularly in high-volume or abrasive applications.

HIGH SPEED, HIGH QUALITY.

Glide through lush stands of alfalfa, acres of dense grass and even tough cane crops, at high ground speeds. Case IH DC3 series center-pivot disc mower conditioners combine fast cutting with high-quality conditioning. Choose from two new models, the DC133 and DC163, built to handle a variety of crops and designed for easy, uninterrupted use. Both let you move quickly and easily from field to field, offer intuitive operation with fewer, simpler adjustments and allow you to pick up speed while maintaining consistent cutting when bad weather is on the horizon.



LARGER, FEWER DISCS.

Cut heights are more consistent, thanks to larger diameter discs that cut lower and at a reduced tilt angle. This combination of larger disc diameters and wider conditioning systems allows the crop to move rearward off the cutterbar sooner, improving crop flow and windrow consistency in tall crops. Fewer discs also means less horsepower is needed to run the mower conditioner.

SIMPLIFIED DRIVELINES.

Case IH DC3 series mower conditioners are driven from the left side of the machine, delivering consistent power across all key functions. The swivel gearbox does not require a steering link, so the PTO shaft maintains perfect alignment.

FASTER DRY DOWN.

Both the roll and flail conditioning systems provide a best-in-class conditioning-to-cut width ratio. The result is a thinner crop mat passing through the system for consistently thorough crop conditioning. This wider system also allows for wider swaths, so more crop is exposed to the sun for better natural dry down.



SWIVEL HITCH OPTIONS.

Choose either the drawbar swivel hitch or two-point swivel hitch and get maximum turning performance with zero driveline wrap-up. PTO power is transferred from the front swivel gearbox to a second swivel gearbox at the rear of the tongue that maintains perfect alignment of the output driveshaft to the cutterbar- and conditioner-drive gearbox on the left side of the unit.



FINE TUNE YOUR CUT.

- 7-degree smooth knives offer clean cutting with less ash content, and will reduce crop blow down in light or short crops.
- 14-degree smooth knives are standard and provide the best choice and value for most conditions.
- 14-degree serrated knives offer extended wear in abrasive conditions.
- 18-degree smooth knives are more effective in down crop conditions by providing more crop lift.
- 18-degree serrated knives offer an advantage in down crops as well as extended wear in abrasive conditions.
- Rock knives are designed for durability in rocky/stony conditions.



All knives feature two cutting edges and can be flipped for double the cutting life.

DESIGNED FOR FASTER CUTTING AND EVEN FASTER REPAIRS.

Maintenance is minimized thanks to fewer discs and a simplified drive system. The Shock Protection system is designed to protect the cutterbar from time-robbing, expensive field failures when an obstruction is encountered. Replacement can be performed in minutes keeping your downtime to a minimum.



QUICK AND EASY IN-FIELD REPAIRS.

Heavy-duty, quick-change knives cut change time in half and are reversible for twice the cutting life. Simply use the provided tool, no wrenches necessary.

EASY ACCESS.

Durable plastic cutterbar bi-fold doors offer improved quality and reliability, while still maintaining easy access to the cutterbar and its components. The poly, bi-fold upper shielding is lighter, provides easier access and is more damage-resistant. It won't become damaged if a shield is inadvertently left open.

GREATER DURABILITY.

The cutterbar system has larger gears, bearings and interconnecting shafts for added durability. Plus the shock protection system protects the cutterbar from time-robbing, expensive field failures if an obstruction is encountered. The individual shock hub "takes the blow", protecting the internal components of the cutterbar.

SPECIFICATIONS	DC133 (ROLL)	DC133 (FLAIL)	DC163 (ROLL)	DC163 (FLAIL)
CUTTER BAR				
Cutting Width	156 in. (4.0 m)		192 in. (4.9 m)	
Cutting Height	0.79–2.7 in. (20–69 mm)			
Cutting Height w/Optional High-Stubble Shoes	3.1–5.5 in. (79–140 mm)			
Cutterbar Tilt Angle	2–10°			
Type Cutterbar	Modular			
Number of Discs / Knives per Disc	8 / 2		10 / 2	
Disc Speed @ 1,000 rpm PTO Speed	2,250 rpm			
Cutterbar Shear Protection	Standard—frangible splines in disc drive hub			
Cutterbar Flotation	Vertical and lateral, adjustable springs			
CONDITIONER				
Type	Chevron intermeshing molded rubber, or chevron intermeshing steel rolls	Flail rotor w/ 120 tapered flails	Chevron intermeshing molded rubber, or chevron intermeshing steel rolls	Flail rotor w/ 120 tapered flails
Length	125 in. (3 175 mm)			
Diameter	2×10.4 in. (264 mm) rolls	1×22 in. (560 mm) flail rotor	2×10.4 in. (264 mm) rolls	1×22 in. (560 mm) flail rotor
Conditioner Drive Method	4 HB V-belt & enclosed gears	4 HB V-belt	4 HB V-belt & enclosed gears	4 HB V-belt
Speed—Standard / Optional	750 / 640 rpm	1,042 / 752 rpm	750 / 640 rpm	1,042 / 752 rpm
Conditioning Roll Tension Adjustment	Single crank	NA	Single crank	NA
Conditioner Gap Adjustment	Drawbolt stop, each end	Single crank adjustment of rotor hood	Drawbolt stop, each end	Single crank adjustment of rotor hood
Swath Width / Windrow Width	10 ft. (3 m) / 3–8 ft. (0.9–2.4 m)	11 ft. (3.4 m) / 3–8 ft. (0.9–2.4 m)	12 ft. (3.7 m) / 3–8 ft. (0.9–2.4 m)	13 ft. (4 m) / 3–8 ft. (0.9–2.4 m)
DRIVELINE				
Input Speed	1,000 rpm			
Driveline Protection	Slip clutch and overrunning clutch assembly @ rear of PTO shaft			
TRACTOR REQUIREMENTS				
Minimum PTO Power Required	90 hp (67 kW)		100 hp (75 kW)	
PTO Shaft Spline / Size Requirements	21-spline / 1 3/8			
Hydraulic Circuits Required	2			
Minimum Relief Pressure Required	1,500 psi (103 bar)			
Electrical	7-pin electrical connector for transport lights			
Drawbar / 3-pt Hitch	ASAE Cat. II or III drawbar or Cat. III 3-pt. hitch		ASAE Cat. III drawbar or Cat. III 3-pt. hitch	
TIRES				
Tubeless Ag Rib Implement Tires	12.5L×15.8 PR			
TRANSPORT SPEED				
Maximum	20 mph (32)			
DIMENSIONS* AND WEIGHT**				
Width (Transport)	13 ft. 4 in. (4.1 m)		16 ft. 7 in. (5.1 m)	
Width (Operating)	19 ft. 5 in. (5.9 m) w/ standard drawbar hitch; 21 ft. 3 in. (6.5 m) w/ 2-pt. swivel hitch; 19 ft. 7 in. (6.0 m) w/ drawbar swivel hitch		24 ft. 11 in. (7.6 m) w/ 2-pt. swivel hitch; 23 ft. 3 in. (7.1 m) w/ drawbar swivel hitch	
Length (Transport)	24 ft. 7 in. (7.5 m) w/ standard drawbar hitch; 26 ft. 5 in. (8.1 m) w/ 2-pt. swivel hitch; 25 ft. 5 in. (7.7 m) w/ drawbar swivel hitch	25 ft. 1 in. (7.6 m) w/ standard drawbar hitch; 26 ft. 11 in. (8.2 m) w/ 2-pt. swivel hitch; 25 ft. 11 in. (7.9 m) w/ drawbar swivel hitch	25 ft. 7 in. (7.8 m) w/ 2-pt. swivel hitch; 29 ft. 5 in. (8.7 m) w/ drawbar swivel hitch	30 ft. 11 in. (9.4 m) w/ 2-pt. swivel hitch; 29 ft. 11 in. (9.1 m) w/ drawbar swivel hitch
Length (Operating)	23 ft. (7 m) w/ 2-pt. hitch; 22 ft. (6.7 m) w/ drawbar hitch		26 ft. 7 in. (8.1 m) w/ 2-pt. hitch; 25 ft. 7 in. (7.8 m) w/ drawbar hitch	
Height (Transport / Operating)	7 ft. 5 in. (2.26 m) / 6 ft. 7 in. (2.0 m)			
Ground Clearance (w/Header Fully Raised)	16.2 in. (411 mm)			
Operating Weight	6,275 lb. (2 846 kg)		6,700 lb. (3 039 kg)	

* Flail curtain is down for all height and length measurements. Length with flail curtain up should be reduced by 6 in. (152 mm). Height with flail curtain up should be increased by 11 in. (279 mm). Windrow shields fully open for length in both transport and operating positions.

** Weights shown with rubber conditioning rolls. For weight w/steel conditioning rolls add 100 lb. (45 kg).

SAFETY NEVER HURTS![™] Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided. CNH Industrial America LLC reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions and illustrative material herein are as accurate as known at time of publication, but are subject to change without notice. Availability of some models and equipment builds varies according to the country in which the equipment is used.

©2018 CNH Industrial America LLC. All rights reserved. Case IH is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH Industrial America LLC, are the property of those respective companies. Printed in U.S.A. www.caseih.com CIH180101



CASE IH
AGRICULTURE