

G-SERIES 4WD
MOTOR GRADERS



JOHN DEERE

620G/GP / 670G/GP / 770G/GP / 870G/GP



**CHOOSE HOW
YOU WORK**



870GP



MORE
CONTROL
OPTIONS

+



MORE
GRADE-CONTROL
PROVIDERS



MORE WAYS TO GET
MORE DONE.



TAKING GRADING PERFORMANCE **TO THE NEXT LEVEL.**

Our motor graders have earned a reputation for exceptional control and grading precision without a lot of extra effort. Inspired by thoughts and ideas from you, our customers, our latest G-Series Graders take it to the next level. With more choices, including our Customer Advocate Group-tested dual-joystick controls. Expanded grade-control system options. And a smaller, more economical machine, the 620G. Existing models boast even more performance, along with a host of proven features to help you boost productivity and maximize uptime while lowering daily operating costs.



WHEN YOU ASK, WE LISTEN: THE 620G GRADER.

Our competitively priced 620G offers contractors, townships, and municipalities the grader they've been asking for, with just the right amount of power and fuel savings of up to 10 percent over our larger models. It's equipped — not stripped — with many of the same features found on its larger siblings, including a superior cooling package and ground-level service.

RIGHT ON THE MONEY

ENHANCED PERFORMANCE, MORE OPTIONS, LOWER COST.

Boasting exceptional balance, improved performance specs, and more maximum capability, G-Series Graders help you do your level best — whether you're a major contractor, working for the county, or running a land-leveling crew.

Improved horsepower and torque

Increased engine horsepower, torque, and blade pull produce generous power and lugging ability, to deliver more power to the ground, easily pull through tough spots, or tackle steep hills.

The right power for the job

G-Series Graders deliver the right amount of power, when you need it. Horsepower and torque are optimized for each gear to maximize performance no matter your application.

Multipurpose for your multiple purposes

Redesigned heavy-duty front and rear axles combined with increased maximum operating weights enable more versatility and better blade pull for utilizing jobsite attachments.

Save fuel with Eco mode

When engaged, Eco mode reduces engine rpm in gears 1–5, optimizing fuel usage and decreasing operating costs by up to 10 percent.

Grade-control system ready

Adding your preferred grade-control system is quick and noninvasive. Grade Pro (GP) models come factory equipped with bulkhead connectors, sensor mounts, electrical wiring harnesses, integrated controls, and universal moldboard-mast mounts. Options installed at the factory on GP models now also include Leica as well as Topcon and Trimble.



GRADE-CONTROL SYSTEM READY

OPTIONAL FROM THE FACTORY



FREEDOM OF CHOICE

WITHOUT LIFTING A FINGER.



SEISMIC SHIFT

The gate-less shifter builds upon proven Deere Event-Based Shifting technology to allow operators to directly move the machine from forward to reverse, in any gear, at any time. It's included on all G and Grade Pro (GP) models with fingertip controls.



CONTROL FREAK

Available as an option on all GP models (not available on G machines), Deere dual-joystick controls require significantly less wrist motion to articulate the motor grader than competitive joystick controls.



AT YOUR COMMAND

Eight armrest-mounted, fingertip-actuated controls, including lever steer, are arranged in the industry-standard pattern on each side of the standard steering wheel. No extra levers are required for grade control. Instead, knob-integrated push buttons provide convenient, fingertip activation.



CHOICE OF CONTROLS:

- DUAL-JOYSTICK CONTROLS (GP MODELS)
- FINGERTIP ARMREST MOUNTED (GP MODELS)
- CONVENTIONAL LEVER OPERATED (G MODELS)
- STEERING WHEEL (STANDARD ON ALL MODELS)

Our G-Series Graders give you more choice of how work gets done. On our GP models opt for dual-joystick controls or choose state-of-the-art fingertip armrest controls. Or have the best of both worlds — a field kit allows you to easily swap between the two. Our G models offer conventional lever-operated controls. And based on customer feedback, all models still have a steering wheel. The choice is yours.

Joystick option

Our dual-joystick controls provide intuitive control with minimal hand motion during direction changes and gear shifts. By eliminating the twisting wrist motion or uncomfortable combinations common to other joystick systems, dual-joystick controls help reduce operator fatigue.

Fine control with less fatigue


Articulation and circle-rotate functions are actuated using proportional roller switches instead of twisting the controller.

Return-to-straight

Return-to-straight automatically straightens an articulated frame at the touch of a button, for quicker work cycles.

Automated cross-slope

Both dual-joystick controls and fingertip armrest controls come equipped with cross-slope and are ready to run the grade-control system of your choice. Automated cross-slope simplifies holding a consistent slope by reducing operation to a single lever. It's a GP feature that helps veteran operators be their best and new operators get up to speed more quickly.

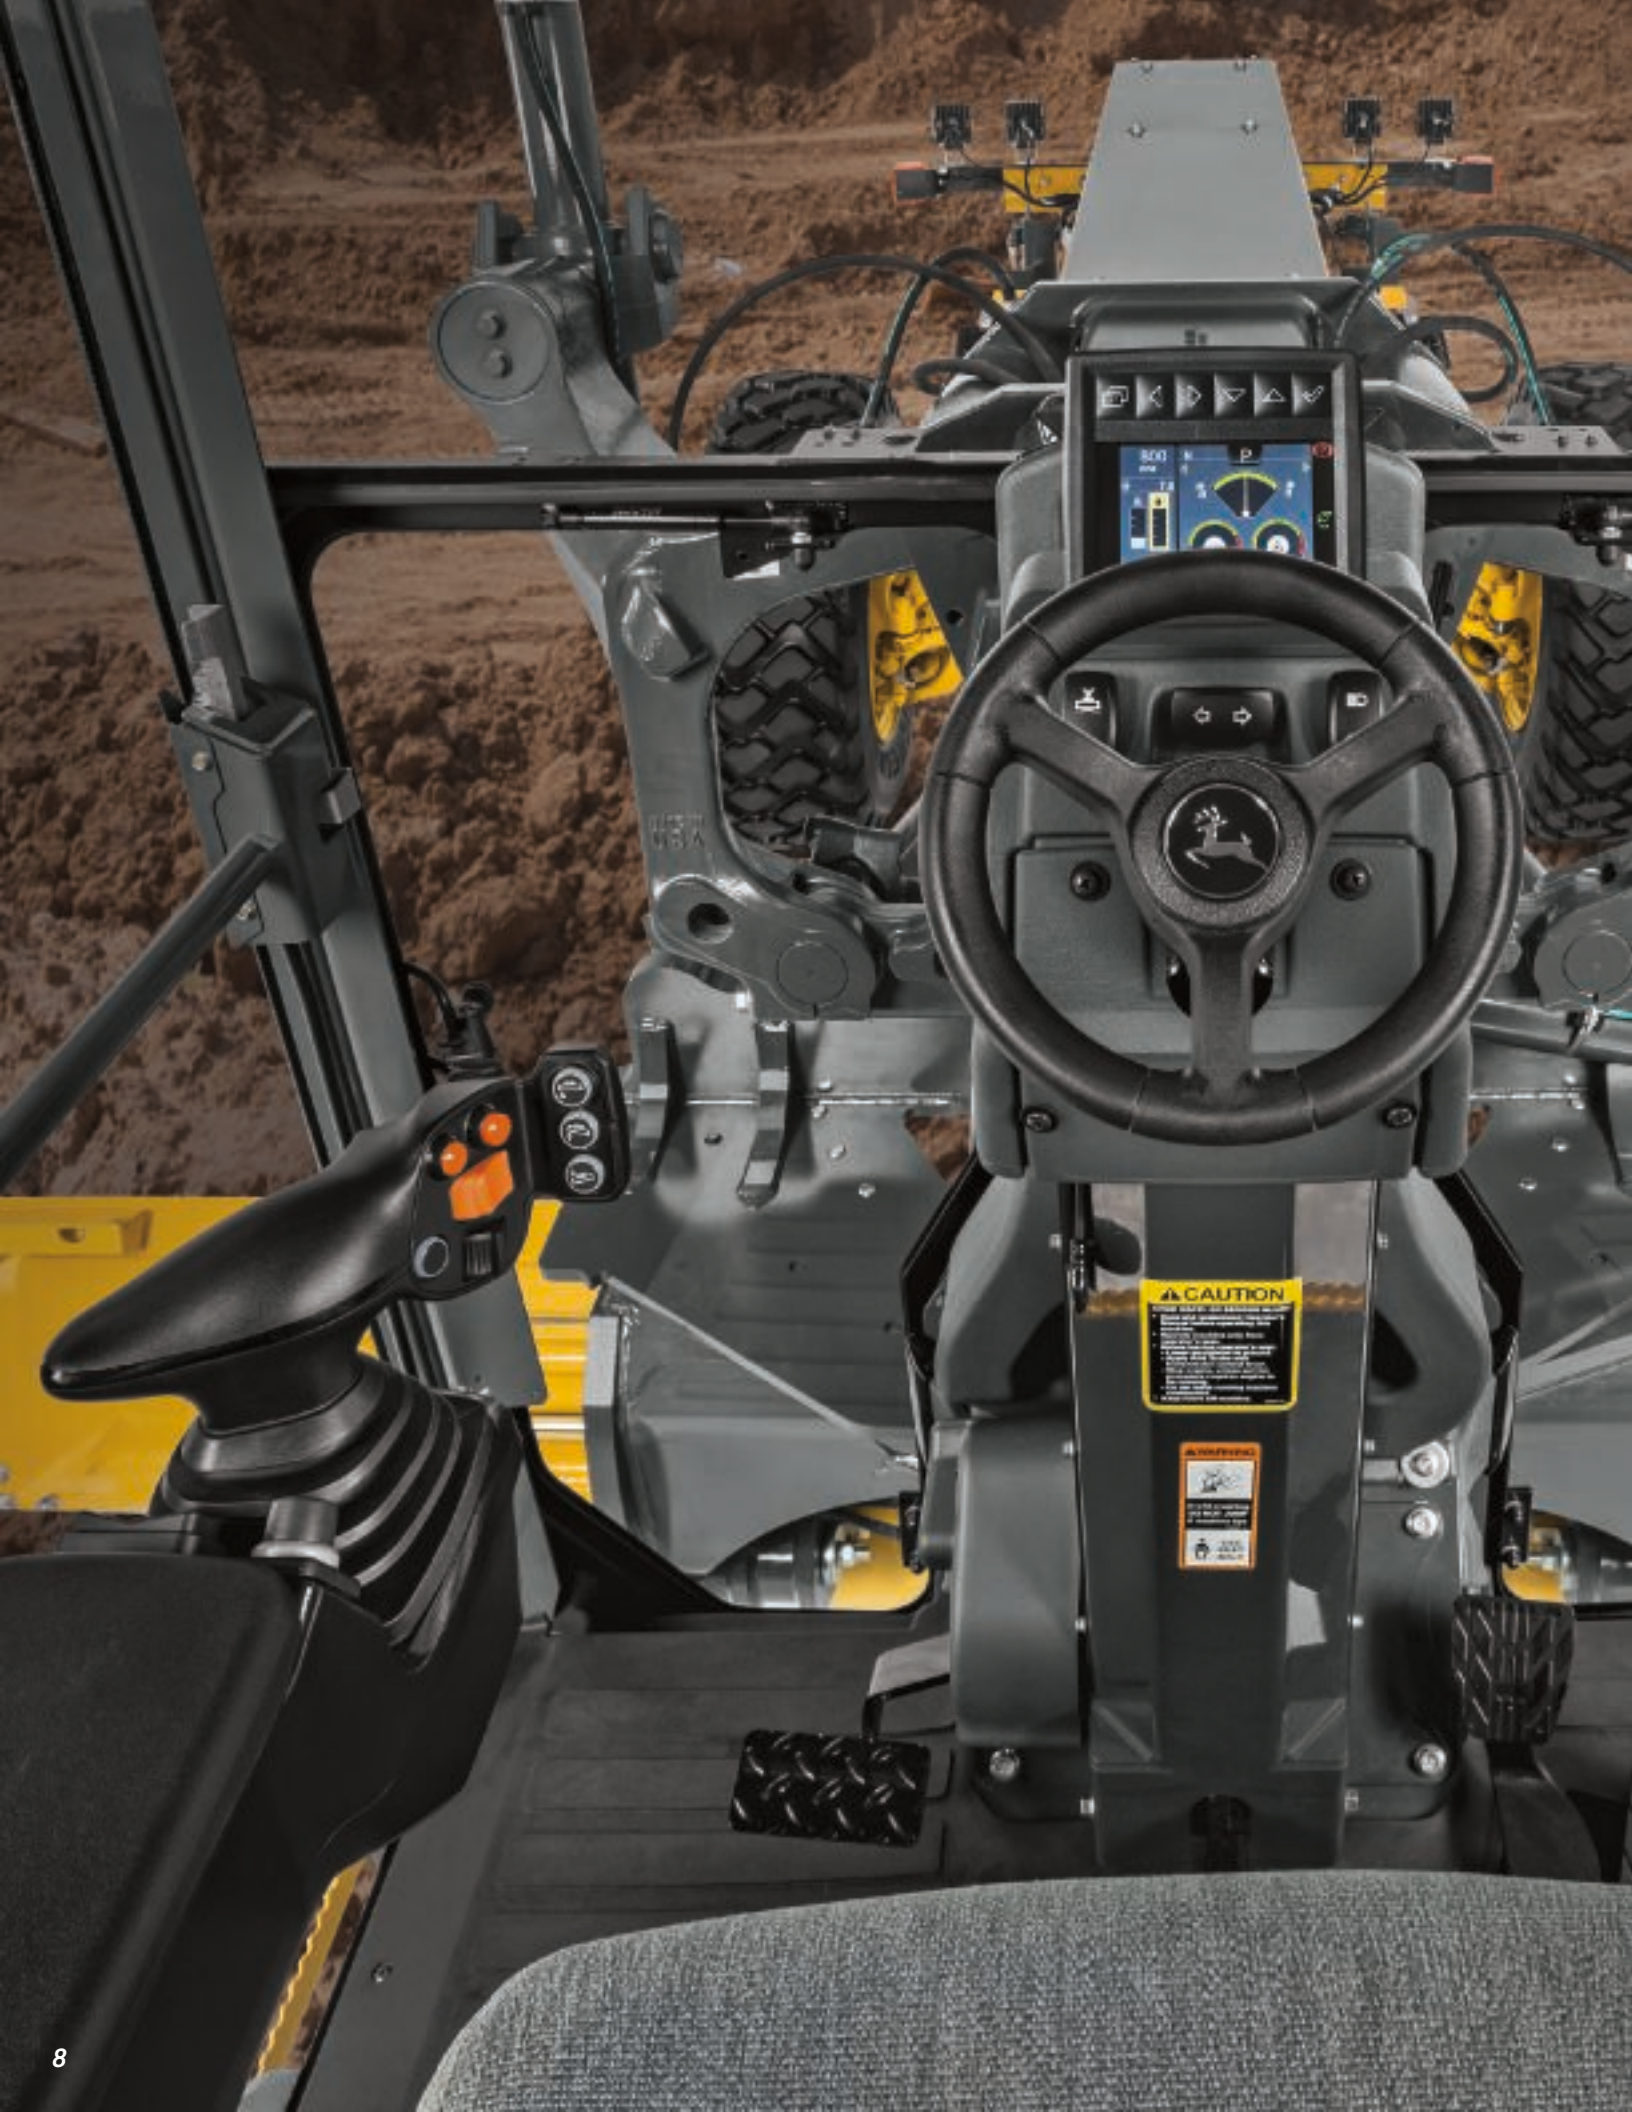

CAUTION
Please read all instructions and warnings before operating this machine. Failure to do so may result in injury or death. For more information, see the operator's manual.

WARNING
Do not drink alcohol or use drugs before operating this machine. For more information, see the operator's manual.



EXPANSIVE VISIBILITY

SIGHT FOR SORE EYES

ENVISION MORE PRODUCTIVITY.

With their exceptional visibility, an LCD high-visibility monitor, and smooth gate-less shifting, it's easy to see why G-Series Graders have become a favorite on a wide range of jobsites.

Exceptional view

All-around visibility is virtually unobstructed, with a clear view to the heel and toe, and behind the moldboard. You can even see the area beneath the front axle, for increased awareness of oncoming obstacles.

Store your stuff

Generous storage space includes numerous overhead compartments, plus a place for a beverage, cooler, cell phone, and other carry-ons.

Lighting the way

Courtesy lighting stays on after machine shutdown and then automatically turns itself off, making it safer to exit the cab after dark, while conserving battery power.

Easy-access park brake

Sealed-switch module provides push-button control of key machine functions, which now also include the parking brake, for more convenient access and easier operation.

LCD hi-vis monitor streamlines access to vital data

LCD hi-vis monitor provides intuitive access via push button to vital machine information displayed as simple, easy-to-navigate icons and menus.



KEEP DOWNTIME DOWN.

SO MUCH TO DO, SO LITTLE TIME

Uptime isn't everything. It's the only thing. Which is why G-Series Graders are loaded with durability-enhancing advantages that help deliver years of trouble-free service. When you know how they're built, you'll run these Deere.



**OPTIONAL
REVERSING FAN**



**Robust, easy-to-clean
cooling package**

Cooling package eliminates stacked coolers. Together with the hinged swing-out fan, access to the cores is quick and cleaning is easy.

**Auto shutdown reduces fuel
use and wear**

Auto shutdown turns off the engine after an operator-determined period of idling. Saves fuel and reduces wear on engine, transmission, and hydraulic components.

**Fuel-efficient, cool-on-demand
fan with reversing option**

Variable-speed hydraulically driven fan runs only as fast or as often as necessary to keep things cool. Helps conserve power and fuel, while reducing noise. Optional reversible fan speeds core cleanout in high-debris applications.

Keep downtime down with

JOHN DEERE ULTIMATE UPTIME

John Deere Ultimate Uptime, featuring John Deere WorkSight™, is a customizable support solution available exclusively from your Deere dealer. This flexible offering maximizes equipment availability with standard John Deere WorkSight capabilities that can help prevent future downtime and speed repairs when needed. In addition to the base John Deere WorkSight features, our dealers work with you to build an uptime package that meets the specific needs of your machine, fleet, project, and business, including customized maintenance and repair agreements, onsite parts availability, extended warranties, fluid sampling, response-time guarantees, and more.

Get valuable insight with

JOHN DEERE WORKSIGHT

John Deere WorkSight is an exclusive suite of telematics solutions that increases uptime while lowering operating costs. At its heart, JDLink™ machine monitoring provides real-time utilization data and alerts to help you maximize productivity and efficiency while minimizing downtime. Remote diagnostics enable your dealer to read codes and record performance data without a trip to the jobsite.



GET IT DONE WITH EASE.

Fast, simple ground-level access

All daily service points, including fuel, are grouped on the left side for quick and convenient ground-level access. On the right side, maintenance personnel will appreciate the easy-access hydraulic, transmission, and differential filter bank.





620G / GP SPECIFICATIONS

Engine		620G/GP	
Manufacturer and Model	John Deere PowerTech™ Plus 6.8L	John Deere PowerTech™ 6.8L	
Non-Road Emission Standard	EPA Tier 3/EU Stage IIIA	EPA Tier 2/EU Stage II	
Cylinders	6	6	
Displacement	6.8L (414 cu. in.)	6.8L (414 cu. in.)	
Net Engine Power			
Gear 1	108 kW (145 hp)	108 kW (145 hp)	
Gear 2	116 kW (155 hp)	119 kW (160 hp)	
Gear 3	127 kW (170 hp)	131 kW (175 hp)	
Gear 4	134 kW (180 hp)	134 kW (180 hp)	
Gear 5	142 kW (190 hp)	138 kW (185 hp)	
Gear 6	146 kW (195 hp)	138 kW (185 hp)	
Gear 7	149 kW (200 hp)	138 kW (185 hp)	
Gear 8	149 kW (200 hp)	138 kW (185 hp)	
Net Peak Torque	915 Nm (675 lb.-ft.)	831 Nm (613 lb.-ft.)	
Net Torque Rise	46%	44%	
Aspiration	Turbocharged, charge-air cooled	Turbocharged, charge-air cooled	
Lubrication	Full-flow spin-on filter and integral cooler	Full-flow spin-on filter and integral cooler	
Air Cleaner with Restriction Indicator	Dual element, dry	Dual element, dry	
Cooling			
Engine Coolant, Extended Life, Rating	-37 deg. C (-34 deg. F)		
Powertrain			
Transmission	Direct-drive John Deere PowerShift Plus™, modulated shift-on-the-go, Event-Based Shifting (EBS), inching pedal; independent transmission reservoir with separate filtration and cooling system with 117-L/min. (31 gpm) gear pump		
Gears			
Forward	8		
Reverse	8		
Maximum Travel Speeds	<i>No tire slip at 2,180 rpm, 14.0-R24 tires</i>		
Gear 1	4.0 km/h (2.5 mph)		
Gear 2	5.6 km/h (3.5 mph)		
Gear 3	7.7 km/h (4.8 mph)		
Gear 4	10.9 km/h (6.8 mph)		
Gear 5	16.4 km/h (10.2 mph)		
Gear 6	23.2 km/h (14.4 mph)		
Gear 7	32.3 km/h (20.1 mph)		
Gear 8	45.5 km/h (28.3 mph)		
Front Axle	Heavy-duty welded fabrication		
Oscillation (total)	32 deg.		
Wheel Lean Angle (each direction)	20 deg.		
Differentials	Spiral bevel; hydraulically actuated, clutch type can be applied on-the-go; selectable manual or automatic differential lock		
Steering (all models include steering wheel)	All-hydraulic power-frame articulation for maneuverability and productivity; crab steering reduces side drift, positions tandems on firm ground, and increases side-slope stability; return-to-straight control included in Grade Pro (GP) option		
Turning Radius (front steer and articulation)	7.21 m (284 in.) (23 ft. 8 in.)		
Articulation (both right and left)	22 deg.		
Final Drives	Inboard-mounted planetary sealed in cooled, filtered oil		
Brakes	Foot-controlled, hydraulically operated, multiple wet-disc brakes sealed in pressurized, cooled, filtered oil; both independent systems effective on all 4 tandem wheels		
Primary and Secondary Brakes	Hydraulically actuated, inboard of tandem pivot, self-adjusting, sealed in cooled and filtered oil, multi-disc (ISO 3450)		
Parking Brake	Automatically spring applied, hydraulically released, oil cooled, self-adjusting (ISO 3450)		
Hydraulics			
Type	Closed-center, pressure-compensated load-sensing (PCLS), variable-displacement piston pump		
Maximum Pump Flow	212 L/min. (56 gpm)		
Maximum System Pressure	18 961 kPa (2,750 psi)		
Pump Displacement	90 cm³ (5.5 cu. in.)		

620G / GP SPECIFICATIONS




Blade Function	620G/GP
All-hydraulic, industry-standard lever placement of blade-function controls; includes float position; 7 discrete saddle positions	
Blade Range	
Lift Above Ground	490 mm (19.3 in.)
Blade Side Shift (right or left)	683 mm (26.9 in.)
Pitch at Ground Line	
Forward	42 deg.
Back	5 deg.
Shoulder Reach Outside Wheels (frame straight, right or left)	2083 mm (82.0 in.) (6 ft. 10 in.)
Bank Cut Angle (right or left)	90 deg.
Blade Pull	
At Maximum Operating Weight	14 091 kg (31,066 lb.)
Electrical	
Solid-state load center and sealed-switch module	
	<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>
Voltage	24 volt
Number of Batteries	2
Battery Capacity	950 CCA
Reserve Capacity	190 min.
Amp-Hour Rating	110 amp-hour
Alternator Rating	
Base	100 amp
Optional	130 amp
Lights	Driving lights; 2 high- and 2 low-beam halogen headlights; front and rear LED turn signals and marker lights; LED brake and hazard warning lights
Mainframe	
Type	Welded box construction
Width (minimum)	307 mm (12.1 in.)
Height (minimum)	307 mm (12.1 in.)
Thickness	
Side	16 mm (0.63 in.)
Top and Bottom Plate	23 mm (0.89 in.)
Modulus	
Minimum Vertical Section	1445 cm ³ (88 cu. in.)
Average Vertical Section at Saddle	2245 cm ³ (137 cu. in.)
Draft Frame (drawbar)	
Welded box construction machined for flatness with double ball-and-socket pivot connection equipped with quick-change replaceable wear inserts	
Circle	
Welded construction, heat-treated, machined for flatness, equipped with quick-change replaceable wear inserts	
Circle Diameter	1524 mm (60 in.)
Rotation	360 deg.
Drive	Hydraulic motor and worm gear with positive lock
Circle Side Shift (right and left)	787 mm (31 in.)
Moldboard	
High-strength, pre-stressed for higher strength; wear-resistant, high-carbon steel and reversible end bits; blade side-shift wear system includes quick-change replaceable wear inserts and quick-adjust jackscrew system	
Base Length	3.66 m (144 in.) (12 ft. 0 in.)
Height (measured along arc, including cutting edge)	610 mm (24 in.)
Thickness	22 mm (0.88 in.)
Cutting Edge	
Dura-Max™ through-hardened steel edge	
Thickness	16 mm (0.62 in.)
Width	152 mm (6 in.)

620G/GP

Scarifiers		620G/GP		
		<i>Front</i>	<i>Mid-mount</i>	
Type		V-type toolbar with manual 2-pitch positions and hydraulic float	Radial linkage, with NeverGrease™ pin joints; V-type manual 3-pitch positions and hydraulic float	
Width of Cut		1.20 m (48 in.) (4 ft. 0 in.)	1.19 m (46.7 in.) (3 ft. 11 in.)	
Number of Shanks/Teeth		5 (maximum capacity 9)	11	
Lift Above Ground		589 mm (23.2 in.)	335 mm (13.2 in.)	
Maximum Depth		335 mm (13.2 in.)	325 mm (12.8 in.)	
Shank				
Spacing		146 mm (5.75 in.)	117 mm (4.6 in.)	
Size		25 x 76 mm (1 x 3 in.)	25 x 76 mm (1 x 3 in.)	
Front Lift Group (Balderson-style)				
Parallel linkage, mechanical pins, and hydraulic float				
Lift				
Above Ground (top of tube)		1864 mm (73.4 in.)		
Range		988 mm (38.9 in.)		
Rear Ripper/Scarifier				
Parallel linkage, with NeverGrease pin joints, hydraulic float, and integrated hitch				
		<i>Ripper</i>	<i>Scarifier</i>	
Width of Cut		2.21 m (87.2 in.) (7 ft. 3 in.)	2.18 m (86 in.) (7 ft. 2 in.)	
Number of Shanks/Teeth		3 (maximum capacity 5)	None standard (maximum capacity 9)	
Lift Above Ground		602 mm (23.7 in.)	810 mm (31.9 in.)	
Maximum Depth		426 mm (16.8 in.)	323 mm (12.7 in.)	
Force at Typical FT4 Weight				
Penetration		9296 kg (20,494 lb.)	—	
Pry-Out		11 222 kg (24,740 lb.)	—	
Shank Size		61.5 x 133 mm (2.42 x 5.25 in.)	25 x 76 mm (1 x 3 in.)	
Operator Station				
Low-profile cab with ROPS (ISO 3471-2008) and FOPS (ISO 3449-2005)				
Tires/Wheels				
		<i>13x24 on 254-mm (10 in.) Rim</i>	<i>14R24 on 254-mm (10 in.) Rim</i>	<i>17.5R25 on 356-mm (14 in.) Rim</i>
Wheel Tread on Ground		2.08 m (82 in.)	2.08 m (82.0 in.)	2.16 m (85.0 in.)
Overall Width		2.49 m (98 in.)	2.49 m (98.0 in.)	2.64 m (104.0 in.)
Ground Clearance (front axle)		557 mm (21.9 in.)	587 mm (23.1 in.)	587 mm (23.1 in.)
Serviceability				
Refill Capacities		<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>		
Fuel Tank		303 L (80 gal.)		
Cooling System		44.0 L (11.6 gal.)		
Engine Oil with Filter		26.0 L (6.9 gal.)		
Transmission Fluid		28.4 L (7.5 gal.)		
Differential Housing		38.0 L (10 gal.)		
Tandem Housings (each)		74.0 L (19.5 gal.)		
Circle Gearbox		5.7 L (1.5 gal.)		
Hydraulic Reservoir		53.0 L (14 gal.)		
Operating Weights				
With Full Fuel Tank, 3.66-m x 610-mm x 22-mm (12 ft. x 24 in. x 0.88 in.) Moldboard with 152-mm x 16-mm (6 in. x 5/8 in.) Cutting Edges, 13-24 Bias L2 Tires, and 79-kg (175 lb.) Operator				
		<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>		
Front		4207 kg (9,275 lb.)		
Rear		10 671 kg (23,525 lb.)		
Total		14 878 kg (32,800 lb.)		
Typical Operating Weight with Front Push Block, Rear Ripper/Scarifier, and Other Equipment				
Front		5080 kg (11,200 lb.)		
Rear		12 428 kg (27,400 lb.)		
Total		17 509 kg (38,600 lb.)		
Maximum Operating Weight		22 680 kg (50,000 lb.)		

Option Weights	620G/GP
Moldboards with Through-Hardened Dura-Max Cutting Edge	
3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.) with 152-mm x 16-mm (6 in. x 5/8 in.) cutting edge and 16-mm (5/8 in.) hardware	0 kg (0 lb.)
3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	45 kg (99 lb.)
4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.) with 152-mm x 16-mm (6 in. x 5/8 in.) cutting edge and 16-mm (5/8 in.) hardware	105 kg (231 lb.)
4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	157.4 kg (347 lb.)
Extensions, 610 mm (2 ft.) (right or left)	
For Use with 610-mm (24 in.) Moldboards	116 kg (255 lb.)
Overlay End Bits, Reversible (one pair)	
For 152-mm (6 in.) Cutting Edge	19.5 kg (43 lb.)
For 203-mm (8 in.) Cutting Edge	23 kg (51 lb.)
Circle-Drive Slip Clutch	9 kg (20 lb.)
Moldboard Impact-Absorption System	43 kg (95 lb.)
Ripper, 3 Shank, No Scarifier	1052 kg (2,319 lb.)
Ripper/Scarifier, Rear Mounted with Hitch and Ripper Shanks (3)	1139 kg (2,510 lb.)
Scarifier Shanks with Teeth (9 for rear ripper/scarifier)	68 kg (150 lb.)
Rear Counterweight with Integral Rear Hitch	727 kg (1,603 lb.)
Rear Hitch	54.4 kg (120 lb.)
Push Block, Front	907 kg (2,000 lb.)
Scarifier	
Front Mount with Teeth (5)	831 kg (1,833 lb.)
Mid-Mount with Teeth (11)	1481 kg (3,265 lb.)
Front Lift Group (Balderson-style)	763 kg (1,682 lb.)
Tires	
13.00-24, 12 PR G2	-79 kg (-174 lb.)
Machine Dimensions	
A Height to Top of Cab	3.18 m (10 ft. 5 in.)
A' Height to Top of Full-Height Cab	3.40 m (11 ft. 2 in.)
B Height to Top of Exhaust	3.10 m (10 ft. 2 in.)
C Height to Top of Blade-Lift Cylinders	3.05 m (10 ft. 0 in.)
D Tandem Axle Spacing	1.54 m (5 ft. 1 in.)
E Blade Base	2.57 m (8 ft. 5 in.)

Option Weights (continued)	620G/GP
Tires (continued)	
14.00-24, 12 PR G2	0 kg (0 lb.)
17.5-25, 12 PR G2/L2	114 kg (252 lb.)
14.00-R24, Radial, G2/L2 General Purpose	220 kg (486 lb.)
14.00-R24, Radial, G2/L2 Snow	261 kg (576 lb.)
17.5-R25, Radial, L2 General Purpose	272 kg (600 lb.)
17.5-R25, Radial, G2/L2 Snow	316 kg (696 lb.)
17.5-R25, Radial, G3/L3 General Purpose	362 kg (798 lb.)
1-Piece Rims	
229 mm x 610 mm (9 in. x 24 in.)	0 kg (0 lb.)
330 mm x 635 mm (13 in. x 25 in.)	65 kg (144 lb.)
Multi-Piece Rims	
254 mm x 610 mm (10 in. x 24 in.)	180 kg (396 lb.)
356 mm x 635 mm (14 in. x 25 in.)	267 kg (588 lb.)
Fenders	
Front	77 kg (169 lb.)
Rear	141 kg (310 lb.)
Low Cab with Opening Front and Side Windows	14.5 kg (32 lb.)
Premium Air-Suspension, Heated Seat with Adjustable Arm- and Headrests	13 kg (28 lb.)
Coolant Heater	4 kg (9 lb.)
Quick Service	11 kg (24 lb.)
Sound-Absorption Package (machines equipped with Tier 3/Stage IIIA and Tier 2/Stage II engines only)	14 kg (31 lb.)
Secondary Steering	26 kg (58 lb.)
Beacon Bracket	8 kg (18 lb.)
Fire Extinguisher	14.5 kg (32 lb.)
Lighting Packages	
10 Halogen Lights	4.5 kg (10 lb.)
16 Halogen Lights	7 kg (16 lb.)
18 Halogen Lights	8 kg (18 lb.)
High-Front Light Bar for Snowplowing	20 kg (44 lb.)
Auxiliary Hydraulic Control Valve Section and Controls	7 kg (15 lb.)
Hydraulics for Front-Mounted Equipment	9 kg (19 lb.)
Machine Dimensions (continued)	
F Wheelbase	6.16 m (20 ft. 3 in.)
G Overall Length	8.89 m (29 ft. 2 in.)
H Overall Length with Scarifier	9.69 m (31 ft. 9 in.)
I Overall Length with Push Block and Ripper	9.99 m (32 ft. 9 in.)
I' Overall Length with Scarifier and Ripper	10.59 m (34 ft. 9 in.)
<i>For Overall Width see Tires/Wheels on page 16.</i>	

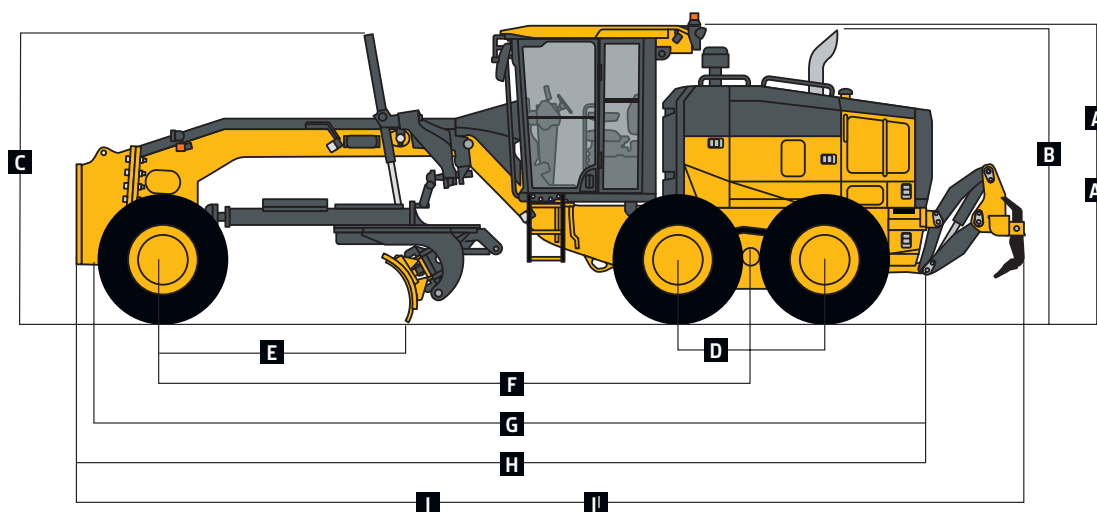



670G / GP SPECIFICATIONS

Engine		670G/GP			
Manufacturer and Model	John Deere PowerTech™ Plus 9.0L	John Deere PowerTech™ 9.0L	John Deere PowerTech Plus 6.8L	John Deere PowerTech 6.8L	
Non-Road Emission Standard	EPA Tier 3/EU Stage IIIA	EPA Tier 2/EU Stage II	EPA Tier 3/EU Stage IIIA	EPA Tier 2/EU Stage II	
Cylinders	6	6	6	6	
Displacement	9.0L (548 cu. in.)	9.0L (548 cu. in.)	6.8L (414 cu. in.)	6.8L (414 cu. in.)	
Net Engine Power					
Gear 1	123 kW (165 hp)	123 kW (165 hp)	116 kW (155 hp)	116 kW (155 hp)	
Gear 2	134 kW (180 hp)	134 kW (180 hp)	119 kW (160 hp)	119 kW (160 hp)	
Gear 3	146 kW (195 hp)	146 kW (195 hp)	131 kW (175 hp)	131 kW (175 hp)	
Gear 4	153 kW (205 hp)	153 kW (205 hp)	138 kW (185 hp)	134 kW (180 hp)	
Gear 5	157 kW (210 hp)	157 kW (210 hp)	142 kW (190 hp)	138 kW (185 hp)	
Gear 6	164 kW (220 hp)	164 kW (220 hp)	146 kW (195 hp)	138 kW (185 hp)	
Gear 7	168 kW (225 hp)	168 kW (225 hp)	149 kW (200 hp)	138 kW (185 hp)	
Gear 8	172 kW (230 hp)	172 kW (230 hp)	153 kW (205 hp)	138 kW (185 hp)	
Net Peak Torque	1204 Nm (888 lb.-ft.)	1204 Nm (888 lb.-ft.)	915 Nm (675 lb.-ft.)	831 Nm (613 lb.-ft.)	
Net Torque Rise	63%	63%	42%	44%	
Aspiration	Turbocharged, charge-air cooled	Turbocharged, charge-air cooled	Turbocharged, charge-air cooled	Turbocharged, charge-air cooled	
Lubrication	Full-flow spin-on filter and integral cooler	Full-flow spin-on filter and integral cooler	Full-flow spin-on filter and integral cooler	Full-flow spin-on filter and integral cooler	
Air Cleaner with Restriction Indicator	Dual element, dry	Dual element, dry	Dual element, dry	Dual element, dry	
Cooling					
Engine Coolant, Extended Life, Rating	-37 deg. C (-34 deg. F)				
Powertrain					
Transmission	Direct-drive John Deere PowerShift Plus™, modulated shift-on-the-go, Event-Based Shifting (EBS), inching pedal; independent transmission reservoir with separate filtration and cooling system with 117-L/min. (31 gpm) gear pump				
Gears					
Forward	8				
Reverse	8				
Maximum Travel Speeds	<i>No tire slip at 2,180 rpm, 14.0-R24 tires</i>				
Gear 1	4.0 km/h (2.5 mph)				
Gear 2	5.6 km/h (3.5 mph)				
Gear 3	7.7 km/h (4.8 mph)				
Gear 4	10.9 km/h (6.8 mph)				
Gear 5	16.4 km/h (10.2 mph)				
Gear 6	23.2 km/h (14.4 mph)				
Gear 7	32.3 km/h (20.1 mph)				
Gear 8	45.5 km/h (28.3 mph)				
Front Axle	Heavy-duty welded fabrication				
Oscillation (total)	32 deg.				
Wheel Lean Angle (each direction)	20 deg.				
Differentials	Spiral bevel; hydraulically actuated, clutch type can be applied on-the-go; selectable manual or automatic differential lock				
Steering (all models include steering wheel)	All-hydraulic power-frame articulation for maneuverability and productivity; crab steering reduces side drift, positions tandems on firm ground, and increases side-slope stability; return-to-straight control included in Grade Pro (GP) option				
Turning Radius (front steer and articulation)	7.21 m (284 in.) (23 ft. 8 in.)				
Articulation (both right and left)	22 deg.				
Final Drives	Inboard-mounted planetary sealed in cooled, filtered oil				
Brakes	Foot-controlled, hydraulically operated, multiple wet-disc brakes sealed in pressurized, cooled, filtered oil; both independent systems effective on all 4 tandem wheels				
Primary and Secondary Brakes	Hydraulically actuated, inboard of tandem pivot, self-adjusting, sealed in cooled and filtered oil, multi-disc (ISO 3450)				
Parking Brake	Automatically spring applied, hydraulically released, oil cooled, self-adjusting (ISO 3450)				
Hydraulics					
Type	Closed-center, pressure-compensated load-sensing (PCLS), variable-displacement piston pump				
Maximum Pump Flow	212 L/min. (56 gpm)				
Maximum System Pressure	18 961 kPa (2,750 psi)				
Pump Displacement	90 cm³ (5.5 cu. in.)				

670G / GP SPECIFICATIONS



Blade Function	670G/GP
All-hydraulic, industry-standard lever placement of blade-function controls; includes float position; 7 discrete saddle positions	
Blade Range	
Lift Above Ground	490 mm (19.3 in.)
Blade Side Shift (right or left)	683 mm (26.9 in.)
Pitch at Ground Line	
Forward	42 deg.
Back	5 deg.
Shoulder Reach Outside Wheels (frame straight, right or left)	2083 mm (82.0 in.) (6 ft. 10 in.)
Bank Cut Angle (right or left)	90 deg.
Blade Pull	
At Maximum Operating Weight	15 501 kg (34,173 lb.)
Electrical	
Solid-state load center and sealed-switch module	<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>
Voltage	24 volt
Number of Batteries	2
Battery Capacity	1,400 CCA
Reserve Capacity	440 min.
Amp-Hour Rating	224 amp-hour
Alternator Rating	
Base	100 amp
Optional	130 amp
Lights	Driving lights; 2 high- and 2 low-beam halogen headlights; front and rear LED turn signals and marker lights; LED brake and hazard warning lights
Mainframe	
Type	Welded box construction
Width (minimum)	307 mm (12.1 in.)
Height (minimum)	307 mm (12.1 in.)
Thickness	
Side	16 mm (0.63 in.)
Top and Bottom Plate	23 mm (0.89 in.)
Modulus	
Minimum Vertical Section	1445 cm ³ (88 cu. in.)
Average Vertical Section at Saddle	2245 cm ³ (137 cu. in.)
Draft Frame (drawbar)	
Welded box construction machined for flatness with double ball-and-socket pivot connection equipped with quick-change replaceable wear inserts	
Circle	
Welded construction, heat-treated, machined for flatness, equipped with quick-change replaceable wear inserts	
Circle Diameter	1524 mm (60 in.)
Rotation	360 deg.
Drive	Hydraulic motor and worm gear with positive lock
Circle Side Shift (right and left)	787 mm (31 in.)
Moldboard	
High-strength, pre-stressed for higher strength; wear-resistant, high-carbon steel and reversible end bits; blade side-shift wear system includes quick-change replaceable wear inserts and quick-adjust jackscrew system	
Base Length	3.66 m (144 in.) (12 ft. 0 in.)
Height (measured along arc, including cutting edge)	610 mm (24 in.)
Thickness	22 mm (0.88 in.)
Cutting Edge	
Dura-Max™ through-hardened steel edge	
Thickness	16 mm (0.62 in.)
Width	152 mm (6 in.)

670G/GP

Scarifiers		670G/GP	
		<i>Front</i>	<i>Mid-mount</i>
Type		V-type toolbar with manual 2-pitch positions and hydraulic float	Radial linkage, with NeverGrease™ pin joints; V-type manual 3-pitch positions and hydraulic float
Width of Cut		1.20 m (48 in.) (4 ft. 0 in.)	1.19 m (46.7 in.) (3 ft. 11 in.)
Number of Shanks/Teeth		5 (maximum capacity 9)	11
Lift Above Ground		589 mm (23.2 in.)	335 mm (13.2 in.)
Maximum Depth		335 mm (13.2 in.)	325 mm (12.8 in.)
Shank			
Spacing		146 mm (5.75 in.)	117 mm (4.6 in.)
Size		25 x 76 mm (1 x 3 in.)	25 x 76 mm (1 x 3 in.)
Front Lift Group (Balderson-style)			
Parallel linkage, mechanical pins, and hydraulic float			
Lift			
Above Ground (top of tube)		1864 mm (73.4 in.)	
Range		988 mm (38.9 in.)	
Rear Ripper/Scarifier			
Parallel linkage, with NeverGrease pin joints, hydraulic float, and integrated hitch			
		<i>Ripper</i>	<i>Scarifier</i>
Width of Cut		2.21 m (87.2 in.) (7 ft. 3 in.)	2.18 m (86 in.) (7 ft. 2 in.)
Number of Shanks/Teeth		3 (maximum capacity 5)	None standard (maximum capacity 9)
Lift Above Ground		602 mm (23.7 in.)	810 mm (31.9 in.)
Maximum Depth		426 mm (16.8 in.)	323 mm (12.7 in.)
Force at Typical FT4 Weight			
Penetration		9520 kg (20,987 lb.)	—
Pry-Out		12 544 kg (27,656 lb.)	—
Shank Size		61.5 x 133 mm (2.42 x 5.25 in.)	25 x 76 mm (1 x 3 in.)
Operator Station			
Low-profile cab with ROPS (ISO 3471-2008) and FOPS (ISO 3449-2005)			
Tires/Wheels			
		<i>14R24 on 254-mm (10 in.) Rim</i>	<i>17.5R25 on 356-mm (14 in.) Rim</i>
Wheel Tread on Ground		2.08 m (82.0 in.)	2.16 m (85.0 in.)
Overall Width		2.49 m (98.0 in.)	2.64 m (104.0 in.)
Ground Clearance (front axle)		587 mm (23.1 in.)	587 mm (23.1 in.)
Serviceability			
		<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>	
Refill Capacities		<i>9.0L engine</i>	<i>6.8L engine</i>
Fuel Tank		416.5 L (110 gal.)	416.5 L (110 gal.)
Cooling System		48.5 L (12.8 gal.)	44.0 L (11.6 gal.)
Engine Oil with Filter		28.0 L (7.4 gal.)	26.0 L (6.9 gal.)
Transmission Fluid		28.4 L (7.5 gal.)	28.4 L (7.5 gal.)
Differential Housing		38.0 L (10 gal.)	38.0 L (10 gal.)
Tandem Housings (each)		74.0 L (19.5 gal.)	74.0 L (19.5 gal.)
Circle Gearbox		5.7 L (1.5 gal.)	5.7 L (1.5 gal.)
Hydraulic Reservoir		53.0 L (14 gal.)	53.0 L (14 gal.)
Operating Weights			
With Full Fuel Tank, 3.66-m x 610-mm x 22-mm (12 ft. x 24 in. x 0.88 in.) Moldboard with 152-mm x 16-mm (6 in. x 5/8 in.) Cutting Edges, 14-24 Bias L2 Tires, and 79-kg (175 lb.) Operator			
		<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>	
Front		4188 kg (9,232 lb.)	
Rear		11 316 kg (24,948 lb.)	
Total		15 504 kg (34,180 lb.)	
Typical Operating Weight with Front Push Block, Rear Ripper/Scarifier, and Other Equipment			
Front		5476 kg (12,072 lb.)	
Rear		13 053 kg (28,778 lb.)	
Total		18 529 kg (40,850 lb.)	
Maximum Operating Weight		24 948 kg (55,000 lb.)	


Option Weights	670G/GP
Moldboards with Through-Hardened Dura-Max Cutting Edge	
3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.) with 152-mm x 16-mm (6 in. x 5/8 in.) cutting edge and 16-mm (5/8 in.) hardware	0 kg (0 lb.)
3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	45 kg (99 lb.)
3.66 m x 686 mm x 25 mm (12 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	126 kg (277 lb.)
3.96 m x 686 mm x 25 mm (13 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	180 kg (396 lb.)
4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.) with 152-mm x 16-mm (6 in. x 5/8 in.) cutting edge and 16-mm (5/8 in.) hardware	105 kg (231 lb.)
4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	157.4 kg (347 lb.)
4.27 m x 686 mm x 25 mm (14 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	251 kg (554 lb.)
4.27 m x 686 mm x 25 mm (14 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 19-mm (3/4 in.) hardware	261 kg (575 lb.)
Extensions, 610 mm (2 ft.) (right or left)	
For Use with 610-mm (24 in.) Moldboards	116 kg (255 lb.)
For Use with 686-mm (27 in.) Moldboards	120 kg (265 lb.)
Overlay End Bits, Reversible (one pair)	
For 152-mm (6 in.) Cutting Edge	19.5 kg (43 lb.)
For 203-mm (8 in.) Cutting Edge	23 kg (51 lb.)
Heavy-Duty Dual-Input Circle-Drive Gearbox	14 kg (31 lb.)
Circle-Drive Slip Clutch	9 kg (20 lb.)
Moldboard Impact-Absorption System	43 kg (95 lb.)
Ripper/Scarifier, Rear Mounted with Hitch and Ripper Shanks (3)	1139 kg (2,510 lb.)
Scarifier Shanks with Teeth (9 for rear ripper/scarifier)	68 kg (150 lb.)
Ripper Shanks and Teeth (2)	63 kg (139 lb.)
Rear Counterweight with Integral Rear Hitch	727 kg (1,603 lb.)
Rear Hitch	54.4 kg (120 lb.)

Machine Dimensions	
A Height to Top of Cab	3.18 m (10 ft. 5 in.)
A' Height to Top of Full-Height Cab	3.40 m (11 ft. 2 in.)
B Height to Top of Exhaust	3.10 m (10 ft. 2 in.)
C Height to Top of Blade-Lift Cylinders	3.05 m (10 ft. 0 in.)
D Tandem Axle Spacing	1.54 m (5 ft. 1 in.)
E Blade Base	2.57 m (8 ft. 5 in.)

Option Weights (continued)	670G/GP
Push Block, Front	1338 kg (2,950 lb.)
Scarifier	
Front Mount with Teeth (5)	831 kg (1,833 lb.)
Mid-Mount with Teeth (11)	1481 kg (3,265 lb.)
Front Lift Group (Balderson-style)	763 kg (1,682 lb.)
Tires	
14.00-24, 12 PR G2	0 kg (0 lb.)
17.5-25, 12 PR G2/L2	114 kg (252 lb.)
14.00-R24, Radial, G2/L2 General Purpose	220 kg (486 lb.)
14.00-R24, Radial, G2/L2 Snow	261 kg (576 lb.)
17.5-R25, Radial, L2 General Purpose	272 kg (600 lb.)
17.5-R25, Radial, G2/L2 Snow	316 kg (696 lb.)
17.5-R25, Radial, G3/L3 General Purpose	362 kg (798 lb.)
1-Piece Rims	
229 mm x 610 mm (9 in. x 24 in.)	0 kg (0 lb.)
330 mm x 635 mm (13 in. x 25 in.)	65 kg (144 lb.)
Multi-Piece Rims	
254 mm x 610 mm (10 in. x 24 in.)	180 kg (396 lb.)
356 mm x 635 mm (14 in. x 25 in.)	267 kg (588 lb.)
Fenders	
Front	77 kg (169 lb.)
Rear	141 kg (310 lb.)
Low Cab with Opening Front and Side Windows	14.5 kg (32 lb.)
Premium Air-Suspension, Heated Seat with Adjustable Arm- and Headrests	13 kg (28 lb.)
Coolant Heater	4 kg (9 lb.)
Quick Service	11 kg (24 lb.)
Sound-Absorption Package (machines equipped with Tier 3/Stage IIIA and Tier 2/Stage II engines only)	14 kg (31 lb.)
Secondary Steering	26 kg (58 lb.)
Beacon Bracket	8 kg (18 lb.)
Fire Extinguisher	14.5 kg (32 lb.)
Lighting Packages	
10 Halogen Lights	4.5 kg (10 lb.)
16 Halogen Lights	7 kg (16 lb.)
18 Halogen Lights	8 kg (18 lb.)
High-Front Light Bar for Snowplowing	20 kg (44 lb.)
Auxiliary Hydraulic Control Valve Section and Controls	7 kg (15 lb.)
Hydraulics for Front-Mounted Equipment	9 kg (19 lb.)

Machine Dimensions (continued)	
F Wheelbase	6.16 m (20 ft. 3 in.)
G Overall Length	8.89 m (29 ft. 2 in.)
H Overall Length with Scarifier	9.69 m (31 ft. 9 in.)
I Overall Length with Push Block and Ripper	9.99 m (32 ft. 9 in.)
I' Overall Length with Scarifier and Ripper	10.59 m (34 ft. 9 in.)

For Overall Width see Tires/Wheels on page 20.

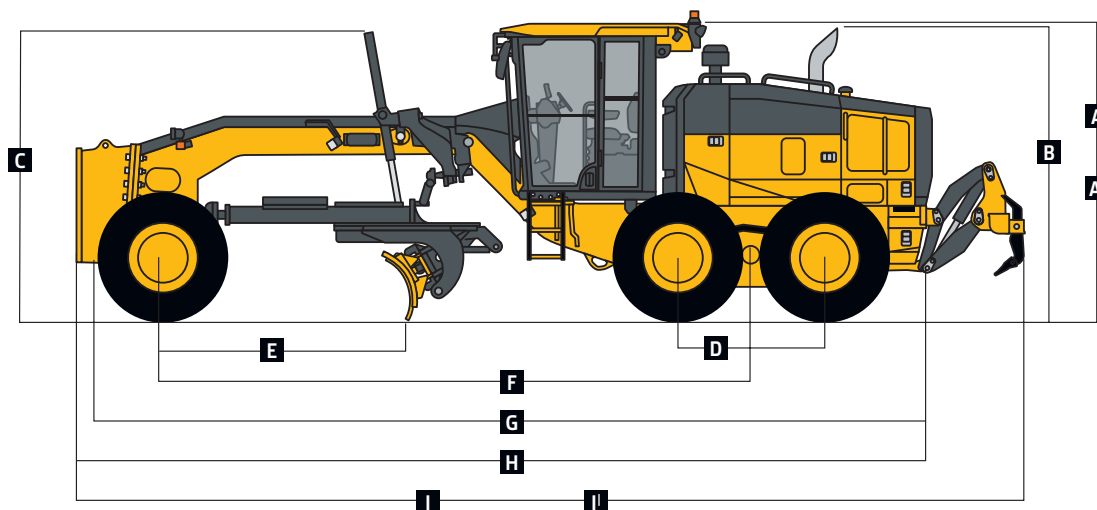



770G / GP SPECIFICATIONS

Engine		770G/GP	
Manufacturer and Model	John Deere PowerTech™ Plus 9.0L	John Deere PowerTech™ 9.0L	
Non-Road Emission Standard	EPA Tier 3/EU Stage IIIA	EPA Tier 2/EU Stage II	
Cylinders	6	6	
Displacement	9.0L (548 cu. in.)	9.0L (548 cu. in.)	
Net Engine Power			
Gear 1	138 kW (185 hp)	138 kW (185 hp)	
Gear 2	149 kW (200 hp)	149 kW (200 hp)	
Gear 3	160 kW (215 hp)	160 kW (215 hp)	
Gear 4	168 kW (225 hp)	168 kW (225 hp)	
Gear 5	172 kW (230 hp)	172 kW (230 hp)	
Gear 6	179 kW (240 hp)	179 kW (240 hp)	
Gear 7	183 kW (245 hp)	183 kW (245 hp)	
Gear 8	187 kW (250 hp)	187 kW (250 hp)	
Net Peak Torque	1291 Nm (952 lb.-ft.)	1291 Nm (952 lb.-ft.)	
Net Torque Rise	64%	64%	
Aspiration	Turbocharged, charge-air cooled	Turbocharged, charge-air cooled	
Lubrication	Full-flow spin-on filter and integral cooler	Full-flow spin-on filter and integral cooler	
Air Cleaner with Restriction Indicator	Dual element, dry	Dual element, dry	
Cooling			
Engine Coolant, Extended Life, Rating	-37 deg. C (-34 deg. F)		
Powertrain			
Transmission	Direct-drive John Deere PowerShift Plus™, modulated shift-on-the-go, Event-Based Shifting (EBS), inching pedal; independent transmission reservoir with separate filtration and cooling system with 117-L/min. (31 gpm) gear pump		
Gears			
Forward	8		
Reverse	8		
Maximum Travel Speeds	<i>No tire slip at 2,180 rpm, 14.0-R24 tires</i>		
Gear 1	4.0 km/h (2.5 mph)		
Gear 2	5.6 km/h (3.5 mph)		
Gear 3	7.7 km/h (4.8 mph)		
Gear 4	10.9 km/h (6.8 mph)		
Gear 5	16.4 km/h (10.2 mph)		
Gear 6	23.2 km/h (14.4 mph)		
Gear 7	32.3 km/h (20.1 mph)		
Gear 8	45.5 km/h (28.3 mph)		
Front Axle	Heavy-duty welded fabrication		
Oscillation (total)	32 deg.		
Wheel Lean Angle (each direction)	20 deg.		
Differentials	Spiral bevel; hydraulically actuated, clutch type can be applied on-the-go; selectable manual or automatic differential lock		
Steering (all models include steering wheel)	All-hydraulic power-frame articulation for maneuverability and productivity; crab steering reduces side drift, positions tandems on firm ground, and increases side-slope stability; return-to-straight control included in Grade Pro (GP) option		
Turning Radius (front steer and articulation)	7.21 m (284 in.) (23 ft. 8 in.)		
Articulation (both right and left)	22 deg.		
Final Drives	Inboard-mounted planetary sealed in cooled, filtered oil		
Brakes	Foot-controlled, hydraulically operated, multiple wet-disc brakes sealed in pressurized, cooled, filtered oil; both independent systems effective on all 4 tandem wheels		
Primary and Secondary Brakes	Hydraulically actuated, inboard of tandem pivot, self-adjusting, sealed in cooled and filtered oil, multi-disc (ISO 3450)		
Parking Brake	Automatically spring applied, hydraulically released, oil cooled, self-adjusting (ISO 3450)		
Hydraulics			
Type	Closed-center, pressure-compensated load-sensing (PCLS), variable-displacement piston pump		
Maximum Pump Flow	212 L/min. (56 gpm)		
Maximum System Pressure	18 961 kPa (2,750 psi)		
Pump Displacement	90 cm³ (5.5 cu. in.)		

770G / GP SPECIFICATIONS



Blade Function	770G/GP
All-hydraulic, industry-standard lever placement of blade-function controls; includes float position; 7 discrete saddle positions	
Blade Range	
Lift Above Ground	490 mm (19.3 in.)
Blade Side Shift (right or left)	683 mm (26.9 in.)
Pitch at Ground Line	
Forward	42 deg.
Back	5 deg.
Shoulder Reach Outside Wheels (frame straight, right or left)	2083 mm (82.0 in.) (6 ft. 10 in.)
Bank Cut Angle (right or left)	90 deg.
Blade Pull	
At Maximum Operating Weight	15 501 kg (34,173 lb.)
Electrical	
Solid-state load center and sealed-switch module	<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>
Voltage	24 volt
Number of Batteries	2
Battery Capacity	1,400 CCA
Reserve Capacity	440 min.
Amp-Hour Rating	224 amp-hour
Alternator Rating	
Base	100 amp
Optional	130 amp
Lights	Driving lights; 2 high- and 2 low-beam halogen headlights; front and rear LED turn signals and marker lights; LED brake and hazard warning lights
Mainframe	
Type	Welded box construction
Width (minimum)	307 mm (12.1 in.)
Height (minimum)	307 mm (12.1 in.)
Thickness	
Side	16 mm (0.63 in.)
Top and Bottom Plate	23 mm (0.89 in.)
Modulus	
Minimum Vertical Section	1770 cm ³ (108 cu. in.)
Average Vertical Section at Saddle	2245 cm ³ (137 cu. in.)
Draft Frame (drawbar)	
Welded box construction machined for flatness with double ball-and-socket pivot connection equipped with quick-change replaceable wear inserts	
Circle	
Welded construction, heat-treated, machined for flatness, equipped with quick-change replaceable wear inserts	
Circle Diameter	1524 mm (60 in.)
Rotation	360 deg.
Drive	Hydraulic motor and worm gear with positive lock
Circle Side Shift (right and left)	787 mm (31 in.)
Moldboard	
High-strength, pre-stressed for higher strength, wear-resistant, high-carbon steel and reversible end bits; blade side-shift wear system includes quick-change replaceable wear inserts and quick-adjust jackscrew system	
Base Length	3.66 m (144 in.) (12 ft. 0 in.)
Height (measured along arc, including cutting edge)	610 mm (24 in.)
Thickness	22 mm (0.88 in.)
Cutting Edge	
Dura-Max™ through-hardened steel edge	
Thickness	16 mm (0.62 in.)
Width	152 mm (6 in.)

770G/GP

Scarifiers		770G/GP	
	<i>Front</i>	<i>Mid-mount</i>	
Type	V-type toolbar with manual 2-pitch positions and hydraulic float	Radial linkage, with NeverGrease™ pin joints; V-type manual 3-pitch positions and hydraulic float	
Width of Cut	1.20 m (48 in.) (4 ft. 0 in.)	1.19 m (46.7 in.) (3 ft. 11 in.)	
Number of Shanks/Teeth	5 (maximum capacity 9)	11	
Lift Above Ground	589 mm (23.2 in.)	335 mm (13.2 in.)	
Maximum Depth	335 mm (13.2 in.)	325 mm (12.8 in.)	
Shank			
Spacing	146 mm (5.75 in.)	117 mm (4.6 in.)	
Size	25 x 76 mm (1 x 3 in.)	25 x 76 mm (1 x 3 in.)	
Front Lift Group (Balderson-style)			
Parallel linkage, mechanical pins, and hydraulic float			
Lift			
Above Ground (top of tube)	1864 mm (73.4 in.)		
Range	988 mm (38.9 in.)		
Rear Ripper/Scarifier			
Parallel linkage, with NeverGrease pin joints, hydraulic float, and integrated hitch			
	<i>Ripper</i>	<i>Scarifier</i>	
Width of Cut	2.21 m (87.2 in.) (7 ft. 3 in.)	2.18 m (86 in.) (7 ft. 2 in.)	
Number of Shanks/Teeth	3 (maximum capacity 5)	None standard (maximum capacity 9)	
Lift Above Ground	602 mm (23.7 in.)	810 mm (31.9 in.)	
Maximum Depth	426 mm (16.8 in.)	323 mm (12.7 in.)	
Force at Typical FT4 Weight			
Penetration	9608 kg (21,182 lb.)	—	
Pry-Out	12 689 kg (27,974 lb.)	—	
Shank Size	61.5 x 133 mm (2.42 x 5.25 in.)	25 x 76 mm (1 x 3 in.)	
Operator Station			
Low-profile cab with ROPS (ISO 3471-2008) and FOPS (ISO 3449-2005)			
Tires/Wheels			
	<i>14R24 on 254-mm (10 in.) Rim</i>	<i>17.5R25 on 356-mm (14 in.) Rim</i>	<i>550/65R25 on 432-mm (17 in.) Rim</i>
Wheel Tread on Ground	2.08 m (82.0 in.)	2.16 m (85.0 in.)	2.21 m (87.0 in.)
Overall Width	2.49 m (98.0 in.)	2.64 m (104.0 in.)	2.77 m (109.0 in.)
Ground Clearance (front axle)	587 mm (23.1 in.)	587 mm (23.1 in.)	612 mm (24.1 in.)
Serviceability			
Refill Capacities	<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>		
Fuel Tank	416.5 L (110 gal.)		
Cooling System	48.5 L (12.8 gal.)		
Engine Oil with Filter	27.0 L (7.1 gal.)		
Transmission Fluid	28.4 L (7.5 gal.)		
Differential Housing	38.0 L (10 gal.)		
Tandem Housings (each)	74.0 L (19.5 gal.)		
Circle Gearbox	5.7 L (1.5 gal.)		
Hydraulic Reservoir	53.0 L (14 gal.)		
Operating Weights			
With Full Fuel Tank, 3.66-m x 610-mm x 22-mm (12 ft. x 24 in. x 0.88 in.) Moldboard with 152-mm x 16-mm (6 in. x 5/8 in.) Cutting Edges, 14R24 L2 Tires, and 79-kg (175 lb.) Operator			
	<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>		
Front	4314 kg (9,510 lb.)		
Rear	11 440 kg (25,220 lb.)		
Total	15 753 kg (34,730 lb.)		
Typical Operating Weight with Front Push Block, Rear Ripper/Scarifier, and Other Equipment			
Front	5605 kg (12,358 lb.)		
Rear	13 175 kg (29,047 lb.)		
Total	18 781 kg (41,405 lb.)		
Maximum Operating Weight	24 948 kg (55,000 lb.)		

Option Weights	770G/GP
Moldboards with Through-Hardened Dura-Max Cutting Edge	
3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.) with 152-mm x 16-mm (6 in. x 5/8 in.) cutting edge and 16-mm (5/8 in.) hardware	0 kg (0 lb.)
3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	45 kg (99 lb.)
3.66 m x 686 mm x 25 mm (12 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	126 kg (277 lb.)
3.96 m x 686 mm x 25 mm (13 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	180 kg (396 lb.)
4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.) with 152-mm x 16-mm (6 in. x 5/8 in.) cutting edge and 16-mm (5/8 in.) hardware	105 kg (231 lb.)
4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	157.4 kg (347 lb.)
4.27 m x 686 mm x 25 mm (14 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	251 kg (554 lb.)
4.27 m x 686 mm x 25 mm (14 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 19-mm (3/4 in.) hardware	261 kg (575 lb.)
Extensions, 610 mm (2 ft.) (right or left)	
For Use with 610-mm (24 in.) Moldboards	116 kg (255 lb.)
For Use with 686-mm (27 in.) Moldboards	120 kg (265 lb.)
Overlay End Bits, Reversible (one pair)	
For 152-mm (6 in.) Cutting Edge	19.5 kg (43 lb.)
For 203-mm (8 in.) Cutting Edge	23 kg (51 lb.)
Heavy-Duty Dual-Input Circle-Drive Gearbox	14 kg (31 lb.)
Circle-Drive Slip Clutch	9 kg (20 lb.)
Moldboard Impact-Absorption System	43 kg (95 lb.)
Ripper/Scarifier, Rear Mounted with Hitch and Ripper Shanks (3)	1139 kg (2,510 lb.)
Scarifier Shanks with Teeth (9 for rear ripper/scarifier)	68 kg (150 lb.)
Ripper Shanks and Teeth (2)	63 kg (139 lb.)
Rear Counterweight with Integral Rear Hitch	727 kg (1,603 lb.)
Rear Hitch	54.4 kg (120 lb.)
Push Block, Front	1338 kg (2,950 lb.)

Machine Dimensions


A Height to Top of Cab	3.18 m (10 ft. 5 in.)
A' Height to Top of Full-Height Cab	3.40 m (11 ft. 2 in.)
B Height to Top of Exhaust	3.10 m (10 ft. 2 in.)
C Height to Top of Blade-Lift Cylinders	3.05 m (10 ft. 0 in.)
D Tandem Axle Spacing	1.54 m (5 ft. 1 in.)
E Blade Base	2.57 m (8 ft. 5 in.)

Option Weights (continued)	770G/GP
Scarifier	
Front Mount with Teeth (5)	831 kg (1,833 lb.)
Mid-Mount with Teeth (11)	1481 kg (3,265 lb.)
Front Lift Group (Balderson-style)	
	763 kg (1,682 lb.)
Tires	
14.00-24, 12 PR G2	- 220.4 kg (- 486 lb.)
17.5-25, 12 PR G2/L2	- 106 kg (- 234 lb.)
14.00-R24, Radial, G2/L2 General Purpose	0 kg (0 lb.)
14.00-R24, Radial, G2/L2 Snow	40.8 kg (90 lb.)
17.5-R25, Radial, L2 General Purpose	51.7 kg (114 lb.)
17.5-R25, Radial, G2/L2 Snow	95.3 kg (210 lb.)
17.5-R25, Radial, G3/L3 General Purpose	141.5 kg (312 lb.)
550/65R25 XLD70 G3/L3 Radial, General Purpose	495.3 kg (1,092 lb.)
1-Piece Rims	
229 mm x 610 mm (9 in. x 24 in.)	0 kg (0 lb.)
330 mm x 635 mm (13 in. x 25 in.)	65.3 kg (144 lb.)
Multi-Piece Rims	
254 mm x 610 mm (10 in. x 24 in.)	179.6 kg (396 lb.)
356 mm x 635 mm (14 in. x 25 in.)	266.7 kg (588 lb.)
432 mm x 635 mm (17 in. x 25 in.)	321.1 kg (708 lb.)
Fenders	
Front	77 kg (169 lb.)
Rear	141 kg (310 lb.)
Low Cab with Opening Front and Side Windows	14.5 kg (32 lb.)
Premium Air-Suspension, Heated Seat with Adjustable Arm- and Headrests	13 kg (28 lb.)
Coolant Heater	4 kg (9 lb.)
Quick Service	11 kg (24 lb.)
Sound-Absorption Package (machines equipped with Tier 3/Stage IIIA and Tier 2/Stage II engines only)	14 kg (31 lb.)
Secondary Steering	26 kg (58 lb.)
Beacon Bracket	8 kg (18 lb.)
Fire Extinguisher	14.5 kg (32 lb.)
Lighting Packages	
10 Halogen Lights	4.5 kg (10 lb.)
16 Halogen Lights	7 kg (16 lb.)
18 Halogen Lights	8 kg (18 lb.)
High-Front Light Bar for Snowplowing	20 kg (44 lb.)
Auxiliary Hydraulic Control Valve Section and Controls	7 kg (15 lb.)
Hydraulics for Front-Mounted Equipment	9 kg (19 lb.)

Machine Dimensions (continued)

F Wheelbase	6.16 m (20 ft. 3 in.)
G Overall Length	8.89 m (29 ft. 2 in.)
H Overall Length with Scarifier	9.69 m (31 ft. 9 in.)
I Overall Length with Push Block and Ripper	9.99 m (32 ft. 9 in.)
II Overall Length with Scarifier and Ripper	10.59 m (34 ft. 9 in.)

For Overall Width see Tires/Wheels on page 24.

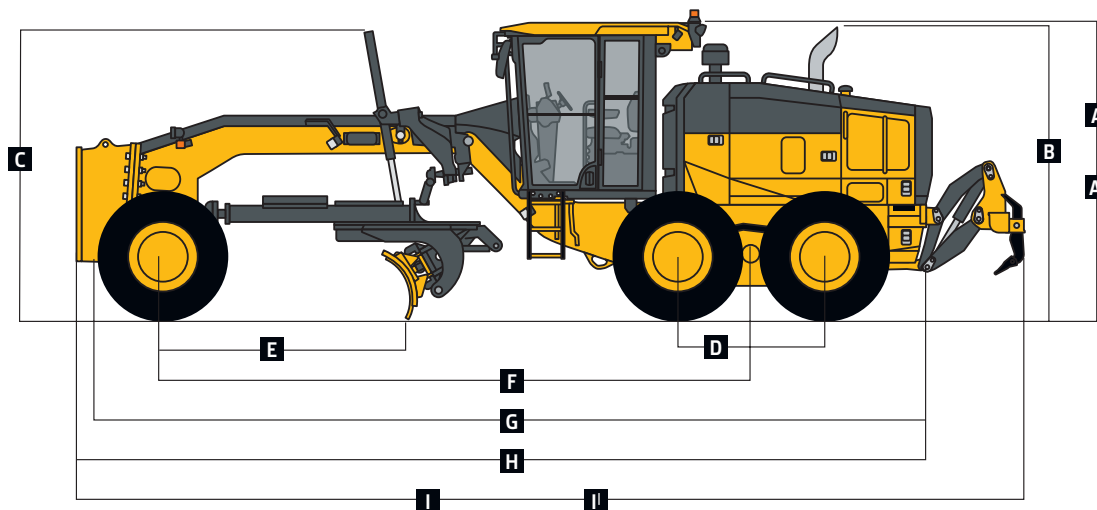



870G / GP SPECIFICATIONS

Engine		870G/GP	
Manufacturer and Model	John Deere PowerTech™ Plus 9.0L	John Deere PowerTech™ 9.0L	
Non-Road Emission Standard	EPA Tier 3/EU Stage IIIA	EPA Tier 2/EU Stage II	
Cylinders	6	6	
Displacement	9.0L (548 cu. in.)	9.0L (548 cu. in.)	
Net Engine Power			
Gear 1	153 kW (205 hp)	153 kW (205 hp)	
Gear 2	164 kW (220 hp)	164 kW (220 hp)	
Gear 3	175 kW (235 hp)	175 kW (235 hp)	
Gear 4	183 kW (245 hp)	183 kW (245 hp)	
Gear 5	187 kW (250 hp)	187 kW (250 hp)	
Gear 6	194 kW (260 hp)	194 kW (260 hp)	
Gear 7	198 kW (265 hp)	198 kW (265 hp)	
Gear 8	201 kW (270 hp)	201 kW (270 hp)	
Net Peak Torque	1329 Nm (980 lb.-ft.)	1329 Nm (980 lb.-ft.)	
Net Torque Rise	57%	57%	
Aspiration	Turbocharged, charge-air cooled	Turbocharged, charge-air cooled	
Lubrication	Full-flow spin-on filter and integral cooler	Full-flow spin-on filter and integral cooler	
Air Cleaner with Restriction Indicator	Dual element, dry	Dual element, dry	
Cooling			
Engine Coolant, Extended Life, Rating	-37 deg. C (-34 deg. F)		
Powertrain			
Transmission	Direct-drive John Deere PowerShift Plus™, modulated shift-on-the-go, Event-Based Shifting (EBS), inching pedal; independent transmission reservoir with separate filtration and cooling system with 121-L/min. (32 gpm) gear pump		
Gears			
Forward	8		
Reverse	8		
Maximum Travel Speeds	<i>No tire slip at 2,180 rpm, 14.0-R24 tires</i>		
Gear 1	3.9 km/h (2.4 mph)		
Gear 2	5.6 km/h (3.5 mph)		
Gear 3	7.9 km/h (4.9 mph)		
Gear 4	10.9 km/h (6.8 mph)		
Gear 5	16.7 km/h (10.4 mph)		
Gear 6	23.3 km/h (14.5 mph)		
Gear 7	32.2 km/h (20.0 mph)		
Gear 8	45.0 km/h (28.0 mph)		
Front Axle	Heavy-duty welded fabrication		
Oscillation (total)	32 deg.		
Wheel Lean Angle (each direction)	20 deg.		
Differentials	Spiral bevel; hydraulically actuated, clutch type can be applied on-the-go; selectable manual or automatic differential lock		
Steering (all models include steering wheel)	All-hydraulic power-frame articulation for maneuverability and productivity; crab steering reduces side drift, positions tandems on firm ground, and increases side-slope stability; return-to-straight control included in Grade Pro (GP) option		
Turning Radius (front steer and articulation)	7.21 m (284 in.) (23 ft. 8 in.)		
Articulation (both right and left)	22 deg.		
Final Drives	Inboard-mounted planetary sealed in cooled, filtered oil		
Brakes	Foot-controlled, hydraulically operated, multiple wet-disc brakes sealed in pressurized, cooled, filtered oil; both independent systems effective on all 4 tandem wheels		
Primary and Secondary Brakes	Hydraulically actuated, inboard of tandem pivot, self-adjusting, sealed in cooled and filtered oil, multi-disc (ISO 3450)		
Parking Brake	Automatically spring applied, hydraulically released, oil cooled, self-adjusting (ISO 3450)		
Hydraulics			
Type	Closed-center, pressure-compensated load-sensing (PCLS), variable-displacement piston pump		
Maximum Pump Flow	218 L/min. (57.5 gpm)		
Maximum System Pressure	18 961 kPa (2,750 psi)		
Pump Displacement	90 cm³ (5.5 cu. in.)		

870G / GP SPECIFICATIONS



Blade Function	870G/GP
All-hydraulic, industry-standard lever placement of blade-function controls; includes float position; 7 discrete saddle positions	
Blade Range	
Lift Above Ground	452 mm (17.8 in.)
Blade Side Shift (right or left)	683 mm (26.9 in.)
Pitch at Ground Line	
Forward	42 deg.
Back	5 deg.
Shoulder Reach Outside Wheels (frame straight, right or left)	2329 mm (91.7 in.) (7 ft. 8 in.)
Bank Cut Angle (right or left)	90 deg.
Blade Pull	
At Maximum Operating Weight	15 501 kg (34,173 lb.)
Electrical	
Solid-state load center and sealed-switch module	
	<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>
Voltage	24 volt
Number of Batteries	2
Battery Capacity	1,400 CCA
Reserve Capacity	440 min.
Amp-Hour Rating	224 amp-hour
Alternator Rating	
Base	100 amp
Optional	130 amp
Lights	Driving lights; 2 high- and 2 low-beam halogen headlights; front and rear LED turn signals and marker lights; LED brake and hazard warning lights
Mainframe	
Type	Welded box construction
Width (minimum)	307 mm (12.1 in.)
Height (minimum)	307 mm (12.1 in.)
Thickness	
Side	16 mm (0.63 in.)
Top and Bottom Plate	30 mm (1.17 in.)
Modulus	
Minimum Vertical Section	1770 cm ³ (108 cu. in.)
Average Vertical Section at Saddle	2635 cm ³ (161 cu. in.)
Draft Frame (drawbar)	
Welded box construction machined for flatness with double ball-and-socket pivot connection equipped with quick-change replaceable wear inserts	
Circle	
Welded construction, heat-treated, machined for flatness, equipped with quick-change replaceable wear inserts	
Circle Diameter	1524 mm (60 in.)
Rotation	360 deg.
Drive	Hydraulic motor and worm gear with positive lock
Circle Side Shift (right and left)	787 mm (31 in.)
Moldboard	
High-strength, pre-stressed for higher strength, wear-resistant, high-carbon steel and reversible end bits; blade side-shift wear system includes quick-change replaceable wear inserts and quick-adjust jackscrew system	
Base Length	4.27 m (168 in.) (14 ft. 0 in.)
Height (measured along arc, including cutting edge)	686 mm (27 in.)
Thickness	25 mm (1 in.)
Cutting Edge	
Dura-Max™ through-hardened steel edge	
Thickness	19 mm (0.75 in.)
Width	203 mm (8 in.)

870G/GP

Scarifiers		870G/GP		
		<i>Front</i>	<i>Mid-mount</i>	
Type		V-type toolbar with manual 2-pitch positions and hydraulic float	Radial linkage, with NeverGrease™ pin joints; V-type manual 3-pitch positions and hydraulic float	
Width of Cut		1.20 m (48 in.) (4 ft. 0 in.)	1.19 m (46.7 in.) (3 ft. 11 in.)	
Number of Shanks/Teeth		5 (maximum capacity 9)	11	
Lift Above Ground		589 mm (23.2 in.)	335 mm (13.2 in.)	
Maximum Depth		335 mm (13.2 in.)	325 mm (12.8 in.)	
Shank				
Spacing		146 mm (5.75 in.)	117 mm (4.6 in.)	
Size		25 x 76 mm (1 x 3 in.)	25 x 76 mm (1 x 3 in.)	
Front Lift Group (Balderson-style)				
Parallel linkage, mechanical pins, and hydraulic float				
Lift				
Above Ground (top of tube)		1864 mm (73.4 in.)		
Range		988 mm (38.9 in.)		
Rear Ripper/Scarifier				
Parallel linkage, with NeverGrease pin joints, hydraulic float, and integrated hitch				
		<i>Ripper</i>	<i>Scarifier</i>	
Width of Cut		2.21 m (87.2 in.) (7 ft. 3 in.)	2.18 m (86 in.) (7 ft. 2 in.)	
Number of Shanks/Teeth		3 (maximum capacity 5)	None standard (maximum capacity 9)	
Lift Above Ground		602 mm (23.7 in.)	810 mm (31.9 in.)	
Maximum Depth		426 mm (16.8 in.)	323 mm (12.7 in.)	
Force at Typical FT4 Weight				
Penetration		10 087 kg (22,238 lb.)	—	
Pry-Out		13 185 kg (29,068 lb.)	—	
Shank Size		61.5 x 133 mm (2.42 x 5.25 in.)	25 x 76 mm (1 x 3 in.)	
Operator Station				
Low-profile cab with ROPS (ISO 3471-2008) and FOPS (ISO 3449-2005)				
Tires/Wheels				
		<i>14R24 on 254-mm (10 in.) Rim</i>	<i>17.5R25 on 356-mm (14 in.) Rim</i>	<i>550/65R25 on 432-mm (17 in.) Rim</i>
Wheel Tread on Ground		2.08 m (82.0 in.)	2.16 m (85.0 in.)	2.21 m (87.0 in.)
Overall Width		2.49 m (98.0 in.)	2.64 m (104.0 in.)	2.77 m (109.0 in.)
Ground Clearance (front axle)		587 mm (23.1 in.)	587 mm (23.1 in.)	612 mm (24.1 in.)
Serviceability				
Refill Capacities		<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>		
Fuel Tank		416.5 L (110 gal.)		
Cooling System		48.5 L (12.8 gal.)		
Engine Oil with Filter		27.0 L (7.1 gal.)		
Transmission Fluid		28.4 L (7.5 gal.)		
Differential Housing		38.0 L (10 gal.)		
Tandem Housings (each)		74.0 L (19.5 gal.)		
Circle Gearbox		5.7 L (1.5 gal.)		
Hydraulic Reservoir		53.0 L (14 gal.)		
Operating Weights				
With Full Fuel Tank, 4.27-m x 686-mm x 25-mm (14 ft. x 27 in. x 1.0 in.) Moldboard with 203-mm x 19-mm (8 in. x ¾ in.) Cutting Edges, 17.5R25 L2 Tires, and 79-kg (175 lb.) Operator				
Operator		<i>EPA Tier 3/EU Stage IIIA and EPA Tier 2/EU Stage II</i>		
Front		4540 kg (10,010 lb.)		
Rear		11 843 kg (26,110 lb.)		
Total		16 384 kg (36,120 lb.)		
Typical Operating Weight with Front Push Block, Rear Ripper/Scarifier, and Other Equipment				
Front		5869 kg (12,940 lb.)		
Rear		13 689 kg (30,179 lb.)		
Total		19 558 kg (43,119 lb.)		
Maximum Operating Weight		24 948 kg (55,000 lb.)		

Option Weights 870G/GP

Moldboards with Through-Hardened Dura-Max Cutting Edge	
3.66 m x 686 mm x 25 mm (12 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x ¾ in.) cutting edge and 16-mm (⅝ in.) hardware	- 126 kg (- 278 lb.)
3.96 m x 686 mm x 25 mm (13 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x ¾ in.) cutting edge and 16-mm (⅝ in.) hardware	- 72 kg (- 159 lb.)
4.27 m x 686 mm x 25 mm (14 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x ¾ in.) cutting edge and 16-mm (⅝ in.) hardware	0 kg (0 lb.)
4.27 m x 686 mm x 25 mm (14 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x ¾ in.) cutting edge and 19-mm (¾ in.) hardware	9.5 kg (21 lb.)
4.88 m x 686 mm x 25 mm (16 ft. x 27 in. x 1 in.) with 203-mm x 19-mm (8 in. x ¾ in.) cutting edge and 19-mm (¾ in.) hardware	137 kg (302 lb.)
Extensions, 610 mm (2 ft.) (right or left)	
For Use with 686-mm (27 in.) Moldboards	120 kg (265 lb.)
Overlay End Bits, Reversible (one pair)	
For 152-mm (6 in.) Cutting Edge	19.5 kg (43 lb.)
For 203-mm (8 in.) Cutting Edge	23 kg (51 lb.)
Heavy-Duty Dual-Input Circle-Drive Gearbox	14 kg (31 lb.)
Circle-Drive Slip Clutch	9 kg (20 lb.)
Moldboard Impact-Absorption System	43 kg (95 lb.)
Ripper/Scarifier, Rear Mounted with Hitch and Ripper Shanks (3)	1139 kg (2,510 lb.)
Scarifier Shanks with Teeth (9 for rear ripper/scarifier)	68 kg (150 lb.)
Ripper Shanks and Teeth (2)	63 kg (139 lb.)
Rear Counterweight with Integral Rear Hitch	727 kg (1,603 lb.)
Rear Hitch	54.4 kg (120 lb.)
Push Block, Front	1338 kg (2,950 lb.)
Scarifier	
Front Mount with Teeth (5)	831 kg (1,833 lb.)
Mid-Mount with Teeth (11)	1481 kg (3,265 lb.)

Machine Dimensions

A Height to Top of Cab	3.18 m (10 ft. 5 in.)
A' Height to Top of Full-Height Cab	3.40 m (11 ft. 2 in.)
B Height to Top of Exhaust	3.10 m (10 ft. 2 in.)
C Height to Top of Blade-Lift Cylinders	3.05 m (10 ft. 0 in.)
D Tandem Axle Spacing	1.54 m (5 ft. 1 in.)
E Blade Base	2.53 m (8 ft. 4 in.)


Option Weights (continued) 870G/GP

Front Lift Group (Balderson-style)	763 kg (1,682 lb.)
Tires	
14.00-24, 12 PR G2	- 272 kg (- 600 lb.)
17.5-25, 12 PR G2/L2	- 158 kg (- 348 lb.)
14.00-R24, Radial, G2/L2 General Purpose	- 52 kg (- 114 lb.)
14.00-R24, Radial, G2/L2 Snow	- 11 kg (- 24 lb.)
17.5-R25, Radial, L2 General Purpose	0 kg (0 lb.)
17.5-R25, Radial, G2/L2 Snow	43.5 kg (96 lb.)
17.5-R25, Radial, G3/L3 General Purpose	90 kg (198 lb.)
550/65R25 XLD70 G3/L3 Radial, General Purpose	444 kg (978 lb.)
Multi-Piece Rims	
254 mm x 610 mm (10 in. x 24 in.)	- 87 kg (- 192 lb.)
356 mm x 635 mm (14 in. x 25 in.)	0 kg (0 lb.)
432 mm x 635 mm (17 in. x 25 in.)	54.4 kg (120 lb.)
Fenders	
Front	77 kg (169 lb.)
Rear	141 kg (310 lb.)
Low Cab with Opening Front and Side Windows	14.5 kg (32 lb.)
Premium Air-Suspension, Heated Seat with Adjustable Arm- and Headrests	13 kg (28 lb.)
Coolant Heater	4 kg (9 lb.)
Quick Service	11 kg (24 lb.)
Sound-Absorption Package (machines equipped with Tier 3/Stage IIIA and Tier 2/Stage II engines only)	14 kg (31 lb.)
Secondary Steering	26 kg (58 lb.)
Beacon Bracket	8 kg (18 lb.)
Fire Extinguisher	14.5 kg (32 lb.)
Lighting Packages	
10 Halogen Lights	4.5 kg (10 lb.)
16 Halogen Lights	7 kg (16 lb.)
18 Halogen Lights	8 kg (18 lb.)
High-Front Light Bar for Snowplowing	20 kg (44 lb.)
Auxiliary Hydraulic Control Valve Section and Controls	7 kg (15 lb.)
Hydraulics for Front-Mounted Equipment	9 kg (19 lb.)

Machine Dimensions (continued)

F Wheelbase	6.16 m (20 ft. 3 in.)
G Overall Length	8.89 m (29 ft. 2 in.)
H Overall Length with Scarifier	9.69 m (31 ft. 9 in.)
I Overall Length with Push Block and Ripper	9.99 m (32 ft. 9 in.)
I' Overall Length with Scarifier and Ripper	10.59 m (34 ft. 9 in.)

For Overall Width see Tires/Wheels on page 28.

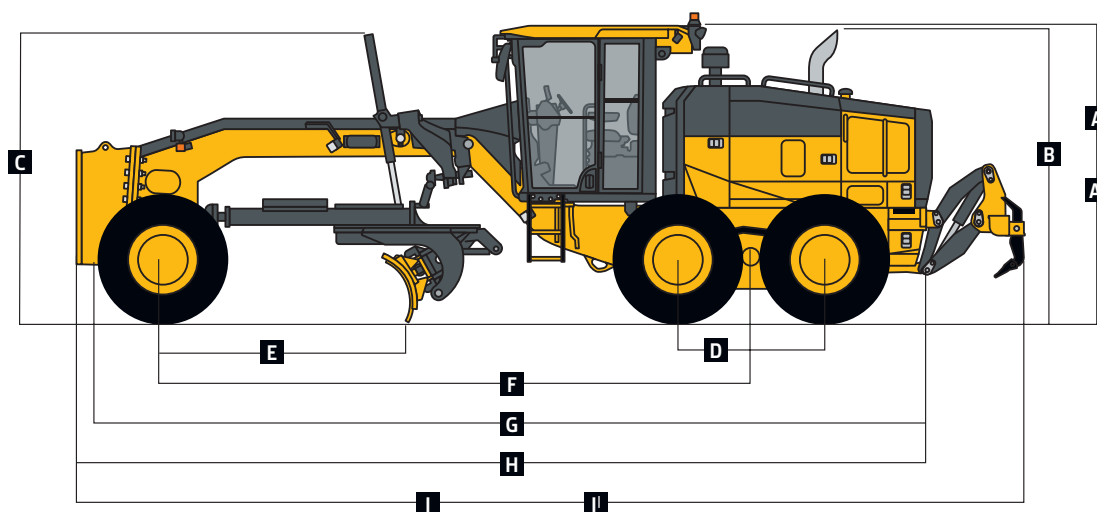

Additional equipment

Key: ● Standard ▲ Optional or special See your John Deere dealer for further information.

620	670	770	870	Operator's Station
●	●	●	●	Low-profile ROPS/FOPS cab with HVAC (ROPS ISO 3471 / FOPS SAE 3449 Level II)
▲	▲	▲	▲	Low-profile ROPS/FOPS cab utilizing laminated glass with fixed lower front and side opening windows
▲	▲	▲	▲	Opening front and side windows (standard with Grade Pro)
●	●	●	●	Keyless start with multiple security modes
●	●	●	●	Fabric air-suspension seat with armrests and headrest
▲	▲	▲	▲	Premium heated, leather/fabric, high-wide-back, air-suspension seat with armrests (standard with Grade Pro)
●	●	●	●	Sealed-switch module with function indicators
●	●	●	●	Electric rear-window defroster
●	●	●	●	Upper front windshield washers with intermittent wipers
▲	●	●	●	Upper rear windshield washers with intermittent wipers
▲	▲	▲	▲	Lower front intermittent wiper and washer
▲	▲	▲	▲	Powered cab precleaner
▲	▲	▲	▲	Decelerator pedal
▲	▲	▲	▲	Flip-down, right- and/or left-hand cab beacon with bracket
●	●	●	●	Cab prewired for beacon, radio, and auxiliary circuit
▲	▲	▲	▲	Front window sun visor / retractable rear sunshade
●	●	●	●	Rearview mirrors, exterior (2) (SAE J985)
▲	▲	▲	▲	Heated exterior mirrors (2) (SAE J985)
▲	▲	▲	▲	Fire extinguisher
▲	▲	▲	▲	High-resolution rearview camera with dedicated monitor
●	●	●	●	Retractable seat belt, 76 mm (3 in.) (SAE 386)
▲	▲	▲	▲	AM/FM radio with auxiliary and Weather Band (WB)
▲	▲	▲	▲	AM/FM radio with Bluetooth®, auxiliary, and WB
●	●	●	●	Push-button-activated cruise control

620	670	770	870	Electrical
●	●	●	●	100-amp alternator
▲	▲	▲	▲	130-amp alternator
●				Batteries (2), 950 CCA with 190-min. reserve capacity
▲	●	●	●	Batteries (2), 1,400 CCA with 440-min. reserve capacity
▲	●	●	●	Left-hand engine compartment service-check light
▲	▲	▲	▲	Right-hand engine compartment service-check light
●	●	●	●	Transporting lights (4 halogen)
▲	▲	▲	▲	Grading lights (10 halogen lights)
▲	▲	▲	▲	Deluxe grading lights (18 halogen lights)
▲	▲	▲	▲	Premium grading lights (18 LED lights)
	▲	▲	▲	Tall front snowplow light bar
●	●	●	●	Multifunction/multi-language diagnostic LCD color monitor
●	●	●	●	Reverse warning alarm (SAE J994)
●	●	●	●	LED brake and turn lights

Moldboard				
Patented pre-stressed, high strength, wear resistant:				
●	●	●		3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.)
	▲	▲	▲	3.66 m x 686 mm x 25 mm (12 ft. x 27 in. x 1 in.)
	▲	▲	▲	3.96 m x 686 mm x 25 mm (13 ft. x 27 in. x 1 in.)
▲	▲	▲		4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.)
	▲	▲	●	4.27 m x 686 mm x 25 mm (14 ft. x 27 in. x 1 in.)
			▲	4.88 m x 686 mm x 25 mm (16 ft. x 27 in. x 1 in.)
●	●	●	●	Quick-change and jackscrew-adjustable moldboard side-shift extreme-duty wear inserts
▲	▲	▲		610-mm (24 in.) left- or right-hand extensions for 610-mm (24 in.) moldboard
		▲	▲	610-mm (24 in.) left- or right-hand extensions for 686-mm (27 in.) moldboard
▲	▲	▲	▲	Reversible overlay endbits

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan at test conditions specified per ISO9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with standard equipment; 14.0 x 610-mm (24 in.) I2 PR G2, Bias tires and 3.66-m x 610-mm x 22-mm (12 ft. x 24 in. x 7/8 in.) high-strength, wear-resistant moldboards with 16-mm x 152-mm (0.63 in. x 6 in.) Dura-Max® through-hardened-steel cutting edges for the 620G, 670G, and 770G; and 17.5 R 635-mm (25 in.) L2, Radial tires and 4.27-m x 688-mm x 25-mm (14 ft. x 27 in. x 1 in.) high-strength, wear-resistant moldboards with 16-mm x 152-mm (0.63 in. x 6 in.) Dura-Max through-hardened-steel cutting edges for the 870G. Weights include lubricants, coolants, full fuel tanks, and 79-kg (175 lb.) operators.

Additional equipment *(continued)*

Key: ● Standard ▲ Optional or special See your John Deere dealer for further information.

620	670	770	870	Overall Vehicle
●	●	●	●	JDLINK™ wireless communication system (available in specific countries; see your dealer for details)
●	●	●	●	Ground-level fuel and diesel exhaust fluid (DEF) filling
▲	●	●	●	Fluid-sampling ports for engine oil and coolant, hydraulic oil, and axle and transmission fluids
●	●	●	●	Vandal-protection locking for: Cab doors / Top tank radiator-access door / Engine coolant surge tank / Hydraulic reservoir cap / Battery-disconnect switch / Ground-level electrical master disconnect switch / Fuel-tank door and cap / Toolbox
●	●	●	●	Environmental drains with hoses for engine, transmission, hydraulic, differential fluids, and engine coolant
▲	▲	▲	▲	Hydraulically driven cool-on-demand reversing fan
●	●	●	●	Banked easy-access vertical spin-on filters for hydraulic, transmission, and axle fluids
●	●	●	●	Engine rotary ejector precleaner
●	●	●	●	Automatic differential lock
●	●	●	●	Engine-stall prevention and auto shutdown
●	●	●		Single-input circle drive
▲	▲	▲		Single-input circle drive with slip clutch
	▲	▲	●	Heavy-duty dual-input circle drive without slip clutch
	▲	▲	▲	Heavy-duty dual-input circle drive with slip clutch
▲	▲	▲	▲	AutoShift transmission
▲	▲	▲	▲	Blade-impact-absorption system
▲	▲	▲	▲	Front and/or rear wheel fenders
▲	▲	▲	▲	Quick-service bank for transmission, hydraulic, engine oil, and engine coolant fluid changes
▲	▲	▲	▲	Secondary steering
	▲	▲	▲	Sound-absorption package (Tier 3/Stage IIIA and Tier 2/Stage II)

620	670	770	870	Front Attachments
▲	▲	▲	▲	Front push block
▲	▲	▲	▲	V-type front scarifier with float position, 5 shanks
▲	▲	▲	▲	Mid-mount scarifier with float position, 11 shanks
▲	▲	▲	▲	Front Balderson-style lift group with float position
▲	▲	▲	▲	Front-mounted dozer blades
Rear Attachments				
●	●	●	●	Full bottom guard with access panel and side guards for rear vehicle protection
▲	▲	▲	▲	Rear-mounted ripper/scarifier combination with rear hitch and pin, 3 ripper shanks
▲	▲	▲	▲	Rear counterweight with rear hitch and pin
▲	▲	▲	▲	Rear hitch and pin
▲	▲	▲	▲	Extra scarifier shanks (9) with teeth for rear ripper scarifier
	▲	▲	▲	Extra ripper shanks (2) with teeth for rear ripper/scarifier
Grade Pro (GP) Option				
●	●	●	●	Low-profile GP cab with opening lower front and side windows
▲	▲	▲	▲	Low-profile GP cab utilizing laminated glass with fixed lower front and side opening windows
●	●	●	●	Premium heated, leather/fabric, high-wide-back, air-suspension seat with armrests
▲	▲	▲	▲	Dual-joystick controls
▲	▲	▲	▲	Fingertip armrest-mounted controls including steering lever
●	●	●	●	Steering wheel
●	●	●	●	Cross-slope
●	●	●	●	Return to straight
●	●	●	●	Grade-control-ready package
Grade Control				
▲	▲	▲	▲	Mast mounts
▲	▲	▲	▲	Topcon ready on GP models*
▲	▲	▲	▲	Trimble ready on GP models*
▲	▲	▲	▲	Leica ready on GP models*

*Available soon on G models.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan at test conditions specified per ISO9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with standard equipment; 14.0 x 610-mm (24 in.) 12 PR G2, Bias tires and 3.66-m x 610-mm x 22-mm (12 ft. x 24 in. x 7/8 in.) high-strength, wear-resistant moldboards with 16-mm x 152-mm (0.63 in. x 6 in.) Dura-Max® through-hardened-steel cutting edges for the 620G, 670G, and 770G; and 17.5 R 635-mm (25 in.) L2, Radial tires and 4.27-m x 688-mm x 25-mm (14 ft. x 27 in. x 1 in.) high-strength, wear-resistant moldboards with 16-mm x 152-mm (0.63 in. x 6 in.) Dura-Max through-hardened-steel cutting edges for the 870G. Weights include lubricants, coolants, full fuel tanks, and 79-kg (175 lb.) operators.



JOHN DEERE

JohnDeere.com/ graders

IN YOUR WORLD,
**DECIDE HOW YOUR
WORK GETS DONE.**

Take control with more options

Inspired by input from customers like you, the reimagined John Deere G-Series Motor Graders include a host of innovative options like expanded grade-control system choices. Dual-joystick controls on GP models. Precision mode on six-wheel-drive machines. And the smaller, more economical 620G and 622G that deliver practical power at up to 10-percent fuel savings over their larger siblings. We give you the power of choice to match your application. So you can choose to **Run Your World.**



DKAGDRROW_EN (digital only) 03-20-18